



syncbox

Guide

Included within:
Dry wall

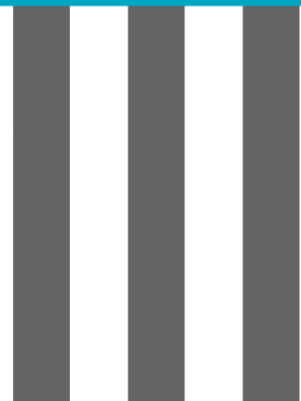


Dry Wall

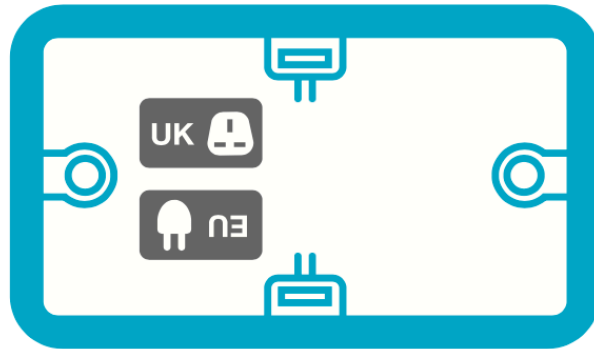


Don't remove flange
(flange is required)

1

Dry Wall

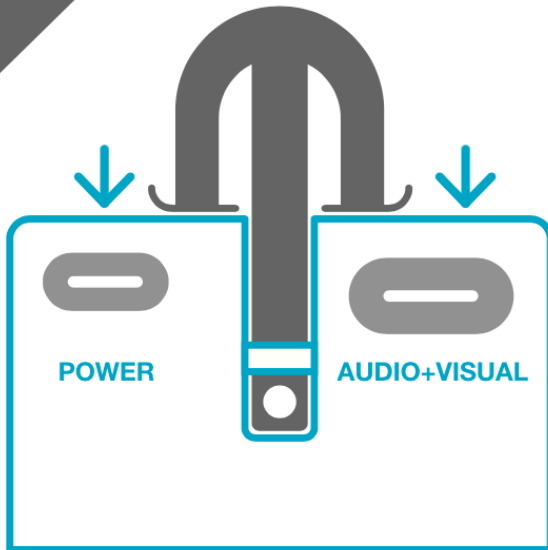


Insert straps to correct position
(don't push all the way)

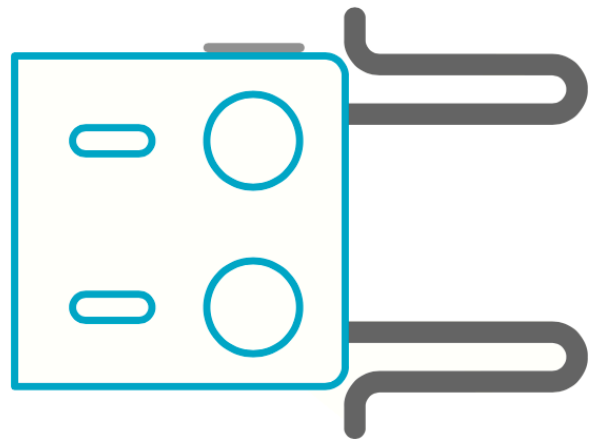

2


Dry Wall

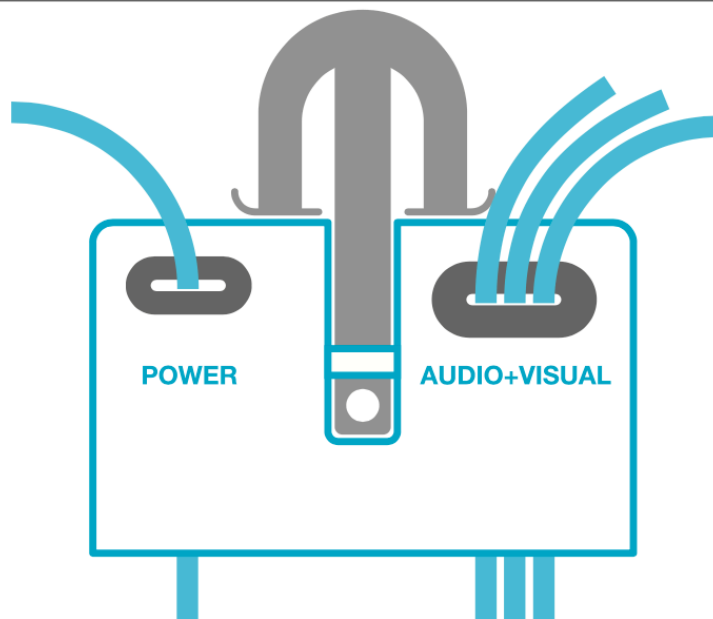

Insert cabling into
designated entries

3


Dry Wall

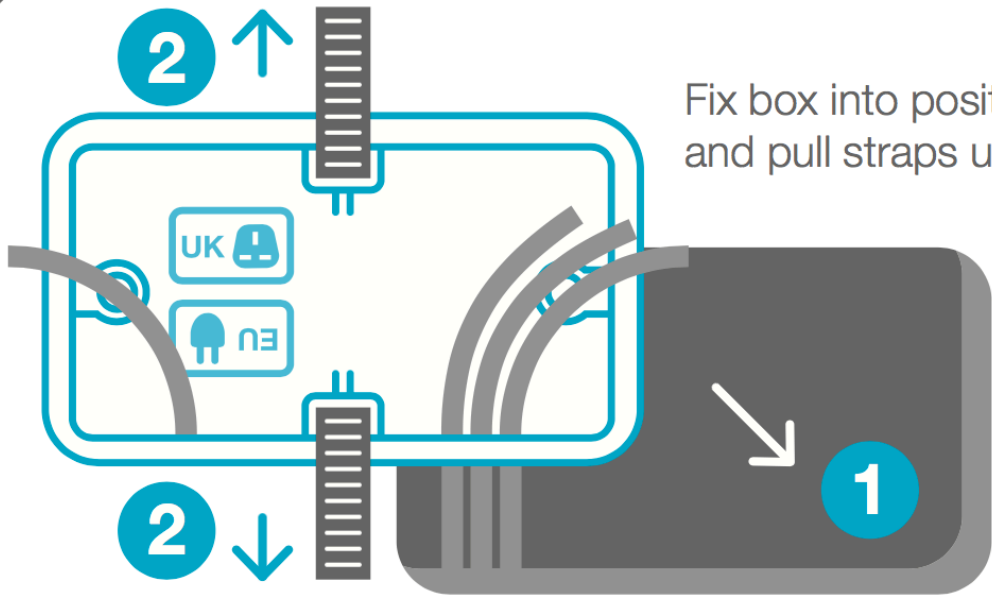

Fix box into position and pull straps until firm

4


Dry Wall

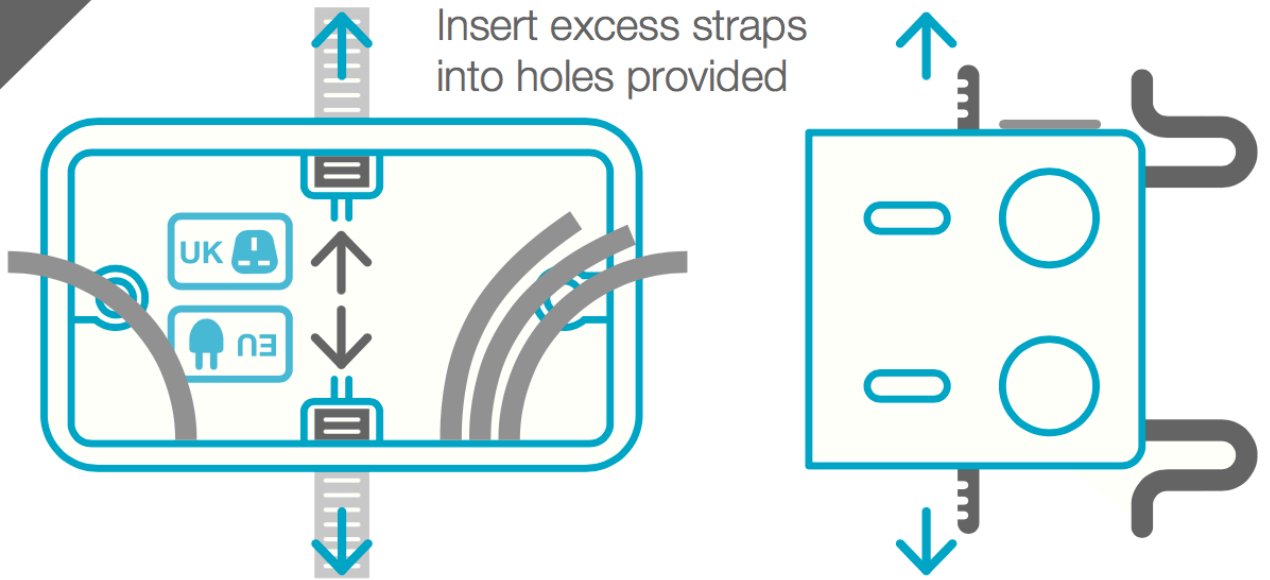

Insert excess straps into holes provided

5


Dry Wall

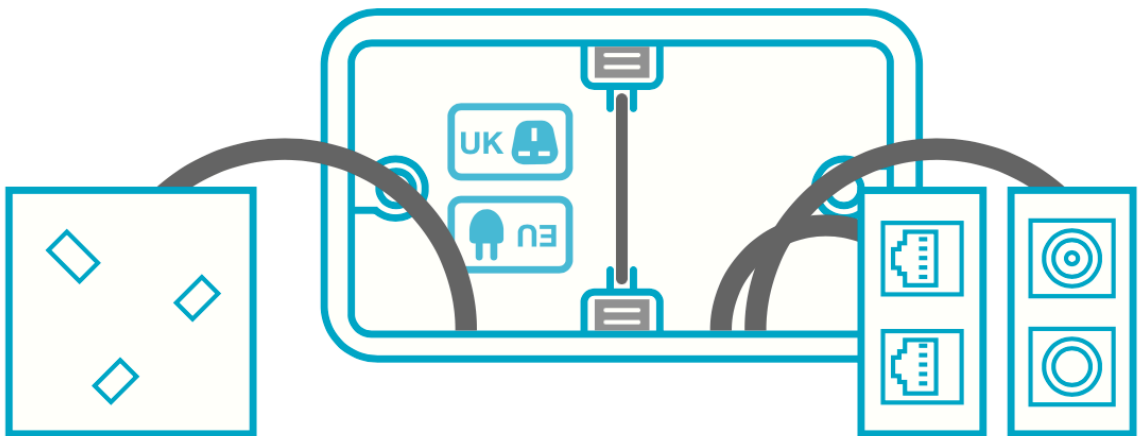

6


Dry Wall

Click modules into frames
(use power divider if required)

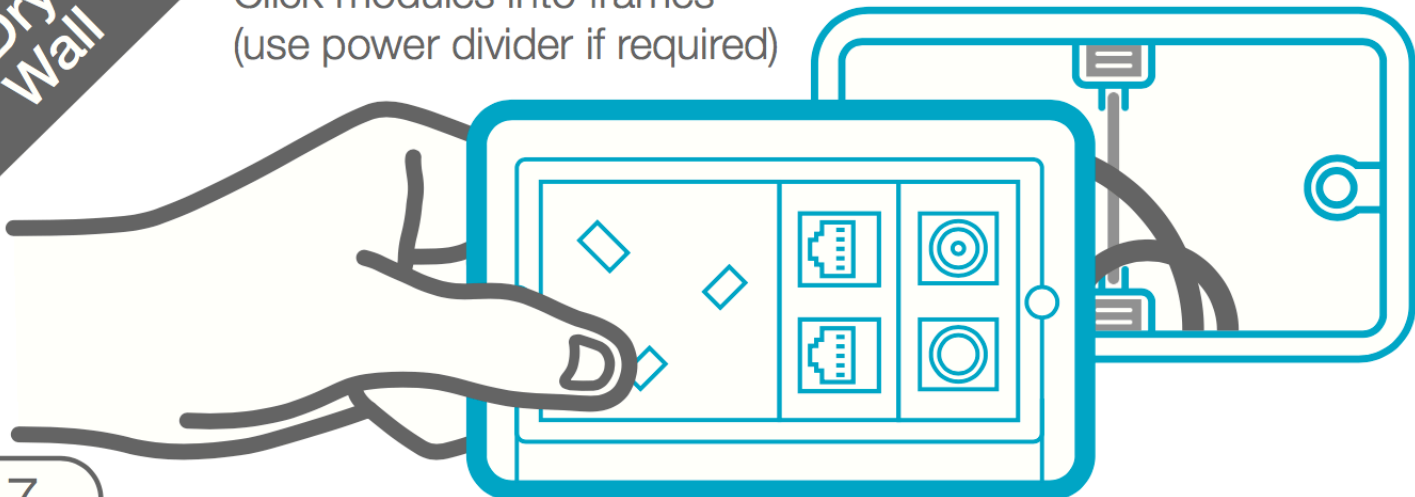

7


Dry Wall

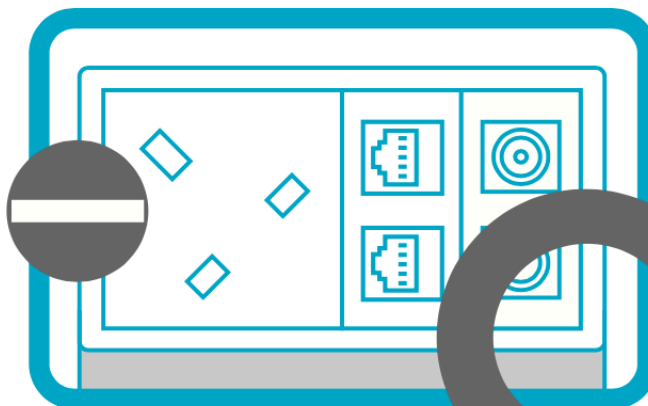

Screw frame into position

8

Dry Wall

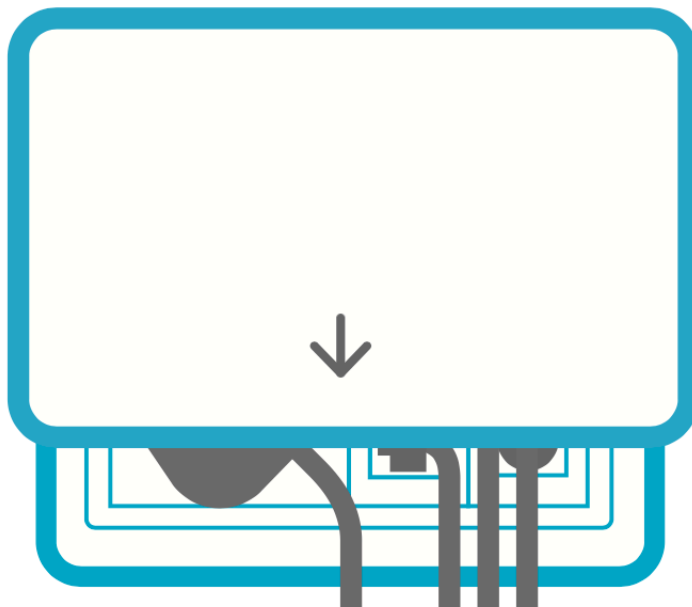

Cable and cover

9