

2273 Series PUSH WIRE® Connectors

Quick, simple & re-usable



The WAGO 2273 Series PUSH WIRE® connector allows fast wiring for solid conductors safely due to the spring clamp connection.

- PUSH WIRE® connection, Re-usable
- 0.5 - 2.5mm², 24A rating, 2, 3, 4, 5 & 8 conductor
- Individual clamps allow for the use of conductors between 0.5 - 2.5mm² within the same connector
- International approvals

Suitable applications:-

- Lighting
 - Power
 - HVAC
- & many more

2273 Selection case:- Part No. 887-100




- 40 x 2273-202
- 50 x 2273-203
- 50 x 2273-204
- 40 x 2273-205
- 20 x 2273-208


2273 Series PUSH WIRE® Connectors

Technical Data


0.5 - 2.5mm² "s"
450V/4 kV/2
24A

 11mm "s" solid


Dimensions (mm)




2273-202
2-conductor




2273-203
3-conductor



2273-204
4-conductor



2273-205
5-conductor



2273-208
8-conductor

Operating



1. Strip the conductor
11mm.



2. Insert the conductor fully
into the housing to complete
the connection.



3. To remove, simply twist
and pull the connector and
conductor at the same time.




Easy testing, test point
on the back of the housing.

Accessories


Enclosure / Mounting Carrier

The 2273 Series connectors should be used within a suitable enclosure. For larger enclosures a mounting carrier can be used.

For single-row
Part No. 2273-500



In the mounting carrier, connectors may be commoned
in longitudinal direction using an 862-482 jumper.
Please note jumpers can not be removed.

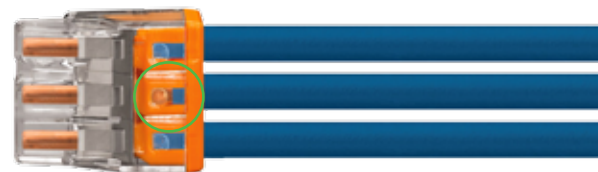

Visual Wiring Inspection

The transparent housing shows that the conductor is fully inserted; within the coloured base, the clear port shows that the conductor's strip length is correct.

Conductors are correctly stripped if the clear port shows no bare conductor on the unprinted connector side. Image above shows the centre conductor with an exceeded strip length.

For further information on the 2273 Series please contact us.