


Wiring

Having correctly identified the wiring from your existing light fitting, pull the wire through the hole and connect to the connection block inside the product in the following way:

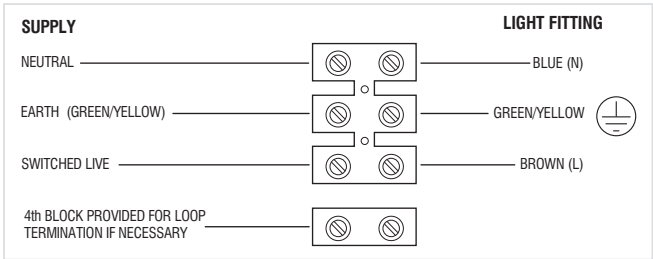

Check that .....

- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the connection block.
- When completed, ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with 2 layers of insulation tape.

Technical data

Supply Voltage: 220-240 V~, 50 Hz

Bulb Type: 78978: 40W LED SMD, 4000K. This product contains a light source of energy efficiency class **F**.  
92520: 25W LED SMD, 4000K. This product contains a light source of energy efficiency class **F**.  
92521: 3W LED SMD, 4000K. This product contains a light source of energy efficiency class **D**.

 Non-replaceable light source


 Non-replaceable control gear

 Conformity with all relevant UKCA Directive requirements.

 Conformity with all relevant EC Directive requirements.

 This light fitting is Class 1 product, must be connected to Earth.

 Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.

 This product is not suitable for dimming.

Care and Safety

We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.  
For your safety, always switch off the power supply before cleaning.  
Always disconnect the product from mains at least 10 minutes allowing to cool down before any maintenance or adjustment.

For further information, please visit <https://www.lighting-info.co.uk/78978>


V2 20/12/2021  
**UK Manufacturer:** BH17 7BY  
**EU Manufacturer:** Brilliant AG,  
Brillantstrasse 1, D-27442 Gnarrenburg

saxby  
lighting

Instruction manual

Kingsley

78978, 92520

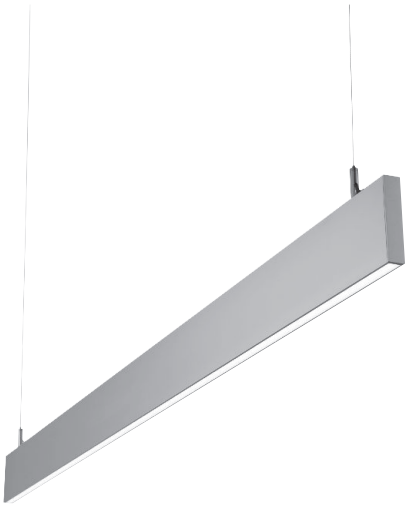

[www.saxbylighting.com](http://www.saxbylighting.com)

saxby  
lighting

## Warning



\*) This light fitting is Class 1 product, must be connected to Earth.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with the IEE Wiring regulations and current Building Regulations.

Check the pack and make sure you have all the parts listed. Please inform your retailer in case of any part shortage.

To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

If replacing an existing fitting, make a careful note of the connections.

This light fitting should be connected to a fused circuit.

We recommend that you use H05RN-F specification cable (not supplied) which is an outdoor grade, rubber sheathed cable.

The mains supply cable must have a minimum cross section area of 1.0mm<sup>2</sup>.


Cables must be protected using suitable conduit or plastic trunking.

Never put anything on the product or hang anything on any part of this product.

Never use the terminal cables to bear the product weight.


Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

## Accessories




Adjustable hanging system

AC007




Round canopy  
with 1.5m white  
power cable

AC004




90° jointer  
(not supplied)




## Connector

DL250-3-1

Linkable  
parts

AC028



LED-048B  
end cap


AC029

## Installation


Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires.

- Note that the power needs to be isolated/switched off at the fuse board.
- Ensure the ceiling is capable of holding the weight of the track and products. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick, cavity walls or plasterboard.
- There are the **A/B/C** installation options to choose from below installation diagram accordingly.
  - For A type, installation details refer to fig **A SUSPENDED**.
  - For B type, installation details should be base on completed "A SUSPENDED" installation, then installed refer to fig **B STRAIGHT LINK**. Max. connect power is 400W.
  - For C type, installation details should be base on completed "A suspended" installation and part 1 to 6 of "B STRAIGHT LINK" installation, then installed refer to fig **C CORNER LINK**. There is 1 kind of the agnel 92521 for 90° corner link for installation.
- Ensure that the product is fixed secure. Replace fuse or circuit breaker and switch on. Your light is now ready for use.


## Installation options





### Step 1



### Step 2



### Step 3

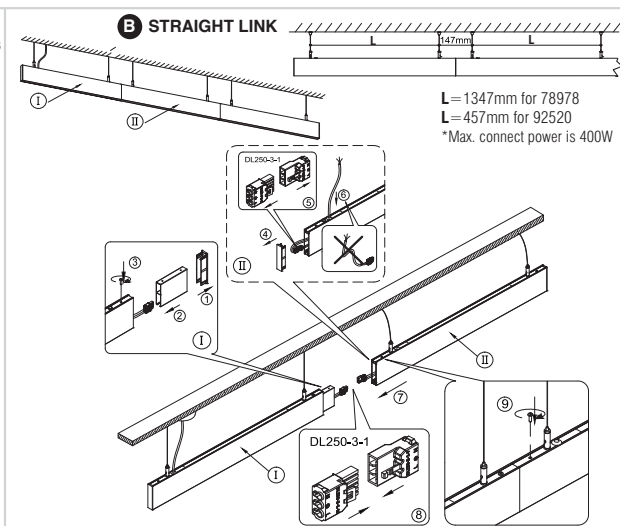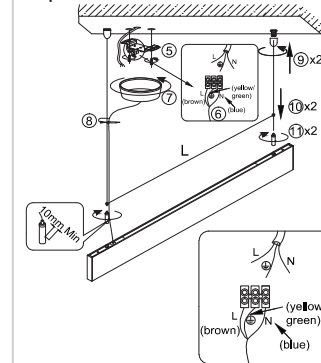

**C CORNER LINK**

