


DURACELL®

76A
Size: LR 44


Zn/MnO₂

Alkaline-Manganese Dioxide

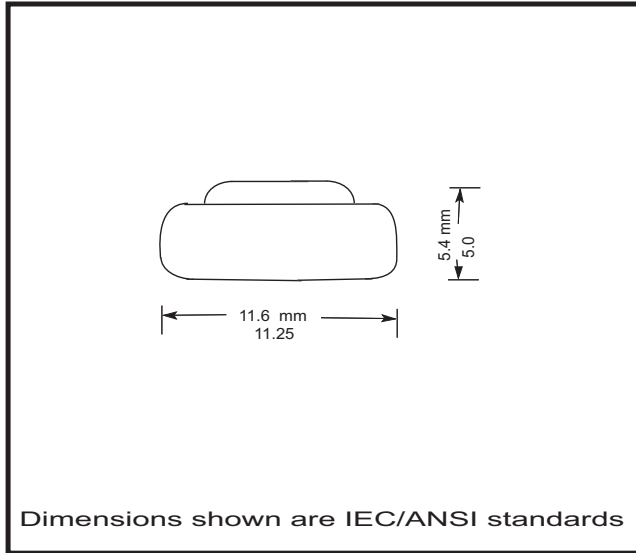

| | |
|------------------------------|---|
| Nominal Voltage: | 1.5 V |
| Average Weight: | 1.7 gm (0.06 oz.) |
| Volume: | 0.57cm ³ (0.035 in. ³) |
| Terminals: | Flat |
| Operating Temperature Range: | -20°C to 54°C (-4°F to 130°F) |
| ANSI: | 1166A |
| IEC: | LR 44 |

Typical Discharge Characteristics at 21 °C (70 °F)

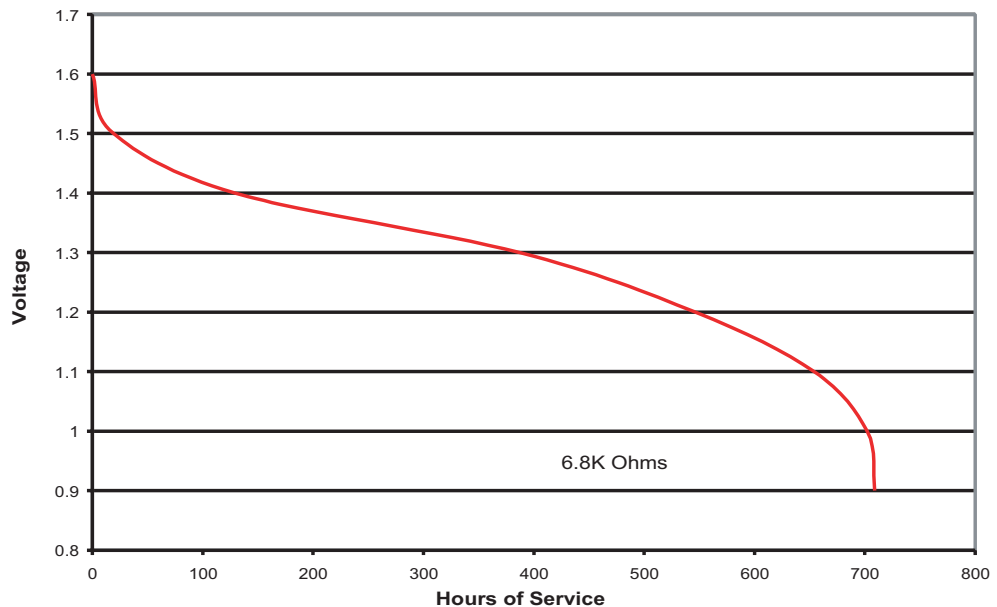

DURACELL®

BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the chart and discharge data shown for examples of the energy / service life that the battery will provide.