

118617

LED Driver Constant Current 40W Wattage Selectable Dimmable

Pro Max
Flight Loop®



Mosfet Dim



Triac/Phase-Cut Dim

World 1st

Global Innovation

Loop In & Loop Out Integrated LED Driver

About

Revolutionary LED Driver

Saxby proudly presents the Pro Max Series, a groundbreaking line of LED driver designed to redefine convenience, efficiency, and cost-effectiveness in the realm of lighting solutions. With a focus on innovation and user-friendly features, the Pro Max Series is set to revolutionize the LED driver market.

Innovated function to meet the need of difference application: Standard, 3CCT, D4i+NFC, DALI Dim-D4i, DALI Dim-DT6, Triac Dim, Triac Dim-3CCT, Wireless Dimming + CCT, 0-10V Dim, Soft-start, Constant Voltage, Constant Current.

- Plug-and-Play Design:

Features a user-friendly plug-and-play design with interchangeable wiring terminals, simplifying the installation process and reducing labor costs for electricians.

- Cost-Effective Installation:

Engineered to minimize installation expenses, the design of the Pro Max Series not only streamlines the power supply installation but also facilitates post-installation maintenance, resulting in overall cost savings.

- Ease of Maintenance:

The Pro Max Series ensures hassle-free maintenance, allowing for the swift replacement of the driver without the need to change wiring terminals. This feature minimizes downtime and enhances the longevity of your lighting system.

- Versatility and Compatibility:

In the event of a driver failure, the Pro Max Series offers the flexibility to replace it with a unit of different power ratings or functionalities, such as upgrading to a dimmable driver of the same size. This adaptability provides significant cost savings and customization options.

- Wide Range of Applications:

The ProMax Series finds its application in a diverse range of LED lighting fixtures, including LED panel, LED downlights, LED spotlights, LED waterproof lights, and LED bracket lights. Its versatile compatibility makes it suitable for various lighting scenarios.

- Global Patents and Innovation:

Boasting global invention patents, the Promax Series stands as the world's first of its kind. Our commitment to innovation ensures that you are investing in a product that is not only cutting-edge but also protected by intellectual property rights.

- Five-Year Quality Assurance:

As a testament to the durability and reliability of the Pro Max Series, we proudly offer a comprehensive 5-year warranty. Rest assured that your lighting infrastructure is supported by a product designed for long-term performance.

Experience the future of LED driver with the Pro Max Series—a symbol of innovation, versatility, and cost efficiency. Choose a lighting solution that not only illuminates but transforms the way we power our world.

LED Driver Constant Current 40W Wattage Selectable Dimmable




Innovated
Constant Current Isolated LED Driver



LED Driver Constant Current 40W Wattage Selectable Dimmable



Schematic diagram

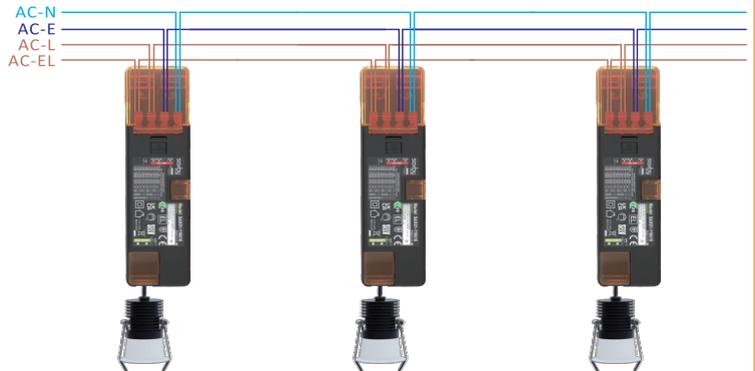

Parameters

- 28-40W
- 30-38V
- 220-240V ac
- Surge protection 1KV
- Operation Temp-20°C – 45°C
- Ta 45°C
- Tc 80°C

Features

- Phase-Cut Dimming
- Dimming with leading edge or trailing edge dimmer
- Smooth dimming compatible with most dimmer
- Dimming range 1...100%
- PF>0.95, THD<15%
- Natural Cooling
- Sealed PC Housing
- SCP/OCP/OVP/OTP


Benefits

- Innovative design
- Flexible replacement
- Versatility and Compatibility
- Ease of Maintenance
- 50,000 hours life time
- 5 years warranty

Applications

- Office luminaries
- LED panel light
- LED down light
- LED linear light
- LED batten light

Details

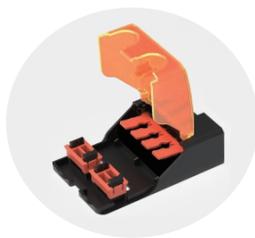

High-quality junction box

+





High-performance driver

=



Flight loop driver

Innovative design with independent LED driver and connector for flexible replacement

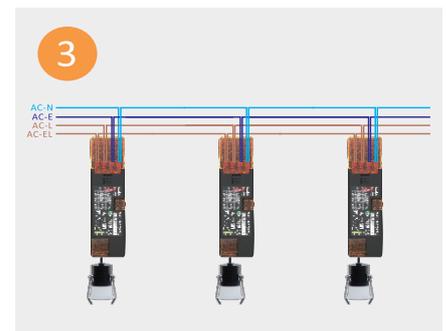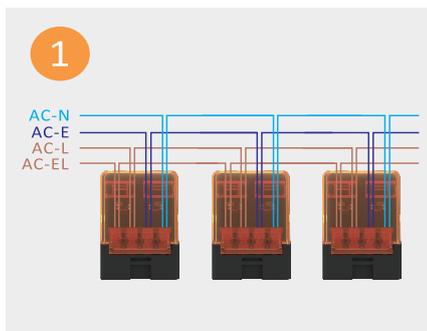

LED Driver Constant Current 40W Wattage Selectable Dimmable

Model list

Model	Output power	Input voltage	Output voltage	Output current	Dimension
SAX01-118617	28-40W	220-240V	30-38V	0.7-1.05A	L189.5*W49*H26mm

Technical data

Product model	SAX01-118617
Input parameters	
Rated input voltage range	220-240V
Limit voltage range	200-264V
Input current(Max)	0.26A Max
Operating frequency	50-60Hz
Power factor/phase shift factor	>0.95/@230Vac full load
Input THD	<15%@230Vac full load
Efficiency(max)	≥88%/@230Vac full load
In-rush current	30A/230Vac Max
Start/Switchover/Turn off	<500MS@230Vac full load
Switching cycles	More than 50,000 times
Power consumption	12%
Output parameters	
Rated output current range	0.7-1.05A
Rated output voltage range	30-38V
Rated output power	28-40W
Current regulation system	Adjust the resistance on the PCB board
Current low frequency ripple	<1%
Output current accuracy	±5%
No load output voltage	55V
Flicker-free(typical)	<0.03
Safety	
Withstand voltage	Input to output 3750v
Mains surge immunity	1KV
Leakage current	<5MA
Isolation resistance	100MΩ/500V
Environment & Life time	
Operating temperature	-20-45°C
Case temperature	80°C
Operating humidity	10-90%RH
Storage temp./humidity	-40-80°C 5-95%RH
IP grade	IP 20
Life-time	50000H
Environmental protection	RoHS

LED Driver Constant Current 40W Wattage Selectable Dimmable

Electrical data controls input

Specification item	Value	Condition
Control method	Fixed	Select output current via the dipswitches

Switch output current


Model:SAX01-118617

Puot Max	Irated	Voltage	1	2	3	4
28W	700mA	30-40V	–	–	–	–
30W	750mA	30-40V	ON	–	–	–
32W	800mA	30-40V	ON	ON	–	–
34W	850mA	30-40V	–	ON	ON	–
36W	900mA	30-40V	ON	ON	ON	–
38W	950mA	30-40V	–	–	ON	ON
40W	1000mA	30-40V	–	ON	ON	ON
40W	1050mA	30-38V	ON	ON	ON	ON

Wiring & Connections

Specifications item	Value	Unit
Input wire cross-section	0.5...2.5	mm ²
	20...12	AWG
Input wire stirped length	9...10	mm
Output wire cross-section	0.3...1.5	mm ²
	22...16	AWG
Output wire stirped length	8..9	mm

Expected lifetime

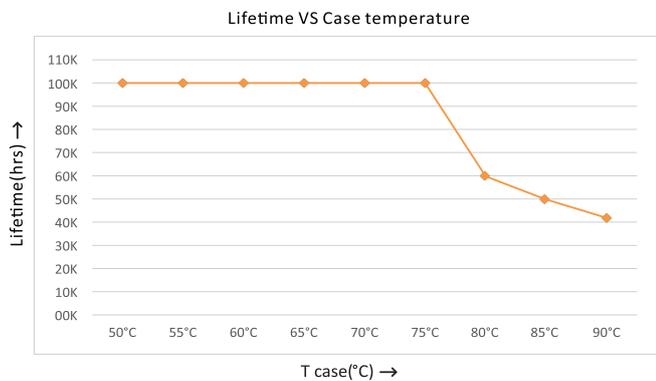


LED Driver Constant Current 40W Wattage Selectable Dimmable


Surge

Model	I _{peak}	T _{width}	Relative number of MCB/pcs														
			B10	B11	B12	B13	B14	B15	B16	B17	B18	B19	B20	B21	B22	B23	B24
SAX01-118617	23A	220us	18	19	21	23	25	27	28	30	32	34	35	37	39	41	43

*Condition: Input 230V AC with full load, cold start Ta≤30°C, MCB without side by side installation.

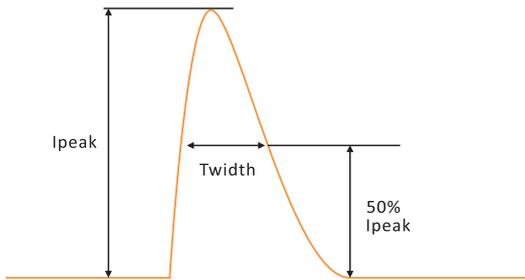

Wiring diagram

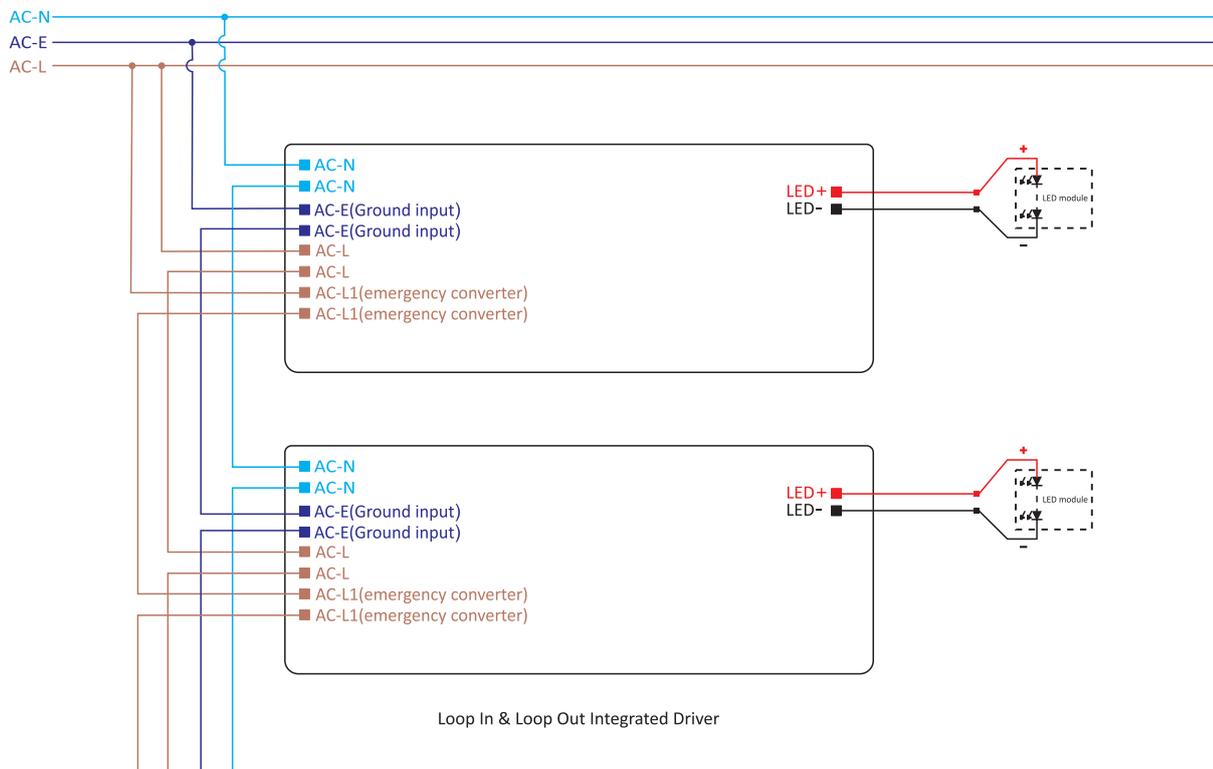


LED Driver Constant Current 40W Wattage Selectable Dimmable

Dimensions

Model: SAX01-118617




Dimensions: L189.5*W49*H26mm

Unit:mm

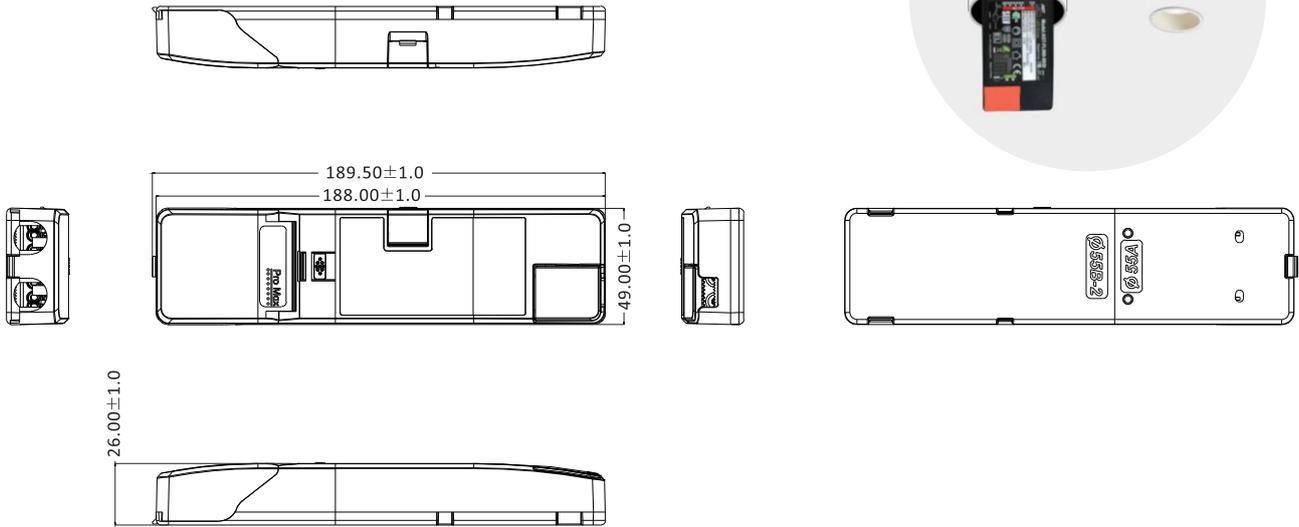

LED Driver Constant Current 40W Wattage Selectable Dimmable

Installation requirements

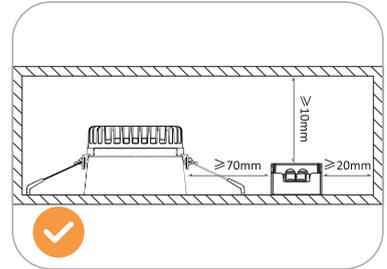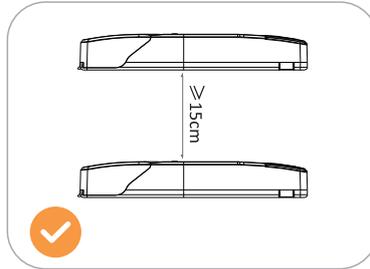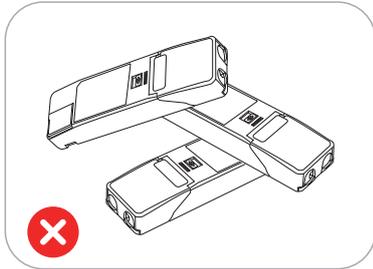

- 1.The two driver cannot be stacked together.
- 2.When installing, there should be at least 15 cm between the two drivers.
- 3.Neither the driver nor the lamps should be covered by any objects.
- 4.LED driver should be installed in a dry, acid-free, fat-free, environment.
- 5.The ambient temperatures should below Ta.
- 6.The temperature of the contact surface of the driver is lower than 40°C.
- 7.Driver should be kept away from heating stuff such as the radiator of the lamp.
- 8.There should be a distance of more than 10 cm between the driver and surrounding objects.
- 9.The installation and replacement of driver should be performed by professional electricians.

Installation procedure

Quick installation and maintenance, minimizing installation and maintenance costs to the maximum extent possible, requiring only 3 seconds for installation and replacement.

- 1.Enhanced safety for protecting the lamps. Electricians first install the junction box during wiring.
- 2.conduct a circuit power test.
- 3.After testing, they install the driver & LED Lamp.

In case the driver malfunctions, simply unplug the power supply and replace it with a new one, completing the replacement process in just 3 seconds.

Label

Unit:mm

Model: SAX01-118617
LED Driver Triac/Phase Dimming

INPUT:220-240V ~ 0.26A 50/60Hz
 OUTPUT:30-38V 1050mA(CO) Max.55Vdc
 Power Factor:0.7C-0.9C 40W

EN 05

UK CA SELV

ta:45°C tc:80°C
 Made in China

DC OUT

No. 1 to No.4 channel Switch output current		1	2	3	4
28W	700mA 30-40V	-	-	-	-
30W	750mA 30-40V	ON	-	-	-
32W	800mA 30-40V	ON	ON	-	-
34W	850mA 30-40V	-	ON	ON	-
36W	900mA 30-40V	ON	ON	ON	-
38W	950mA 30-40V	-	ON	ON	ON
40W	1000mA 30-40V	-	ON	ON	ON
40W	1050mA 30-38V	ON	ON	ON	ON

76mm*39.5mm