



Wired



data sheet

WK-MOD

CONTROL MODULE FOR RAKO WIRED SYSTEMS

WHAT IS IT ?

A hard wired push button control module that accommodates up to 12 backlit push buttons. Standard button configurations are shown overleaf with their corresponding part numbers.

Hand finished metal surrounds are available in a number of finishes and should be ordered separately;

Satin Chrome: HS-MOD-SC

Polished Chrome: HS-MOD-PC

Antique Brass: HS-MOD-AB

Polished Brass: HS-MOD-PB

Matt Bronze: HS-MOD-BM

Matt White: HS-MOD-WH

Matt Black: HS-MOD-MB

The WK-MOD-xxx-x connects to the Rako wired network pre-configured to give basic control as defined by the button layout purchased.

The keypad opposite shows:

WK-MOD-110-B with HS-MOD-BM surround.

Product code Key:

WK-MOD	XXX	X
Product prefix code	Button Layout	Button colour
WK-MOD	070 110 020 etc. see overleaf for full range	B (Black)

Wired push button wall plate with up to 12 push buttons. Customisable and programmable via RASOFT Pro



SIMPLE, FLEXIBLE CONTROL

The WK-MOD-xxx-x uses three different button sizes across a range of keypad layouts. This offers a truly flexible range of designs to suit all your lighting control requirements including: Curtain, Blind, Audio, Multi and Single Room layouts.

A WK-HUB and Rasoft Pro programming software is required for setup and configuration of the WK-MOD-xxx-x. Once addressed it is possible to control any Room/Channel in the system, sending commands to each including:

- Scene selection
- Scene toggle
- Level toggle
- Room/Channel raise & lower
- Macro start/stop/control
- House Master controls

Laser etched buttons are backlit with fully programmable blue LEDs.

Designed for use with standard UK single gang back box. Easy connection to the Rako wired CAT5 network is by a removable 8 way Krone punch down module. This can be installed at first fix stage prior to the push button front control module. This protects the control module from being damaged while building works are being finished



Wired



data sheet


WK-MOD

CONTROL MODULE FOR RAKO WIRED SYSTEMS

technical data

dimensions	Control Panel: 86x86x35mm Surround: 88x88x6mm
fixing	Flush mounting into standard UK single gang back box, minimum depth:35mm
input supply	15V DC from Rako wired system
weight	115g
climate range	Temperature +2C to +40C Humidity +5% to 95% non condensing.
cable type	UTP CAT5e or CAT6
terminal type	8 way Krone punch down (screw terminal available by special arrangement)
communication	Wired Network: CAN
memory	Flash memory (non volatile) Firmware upgrades via RASOFT Pro
standards	Emissions - EN61000-6-3 : 2007 Immunity - EN61000-6-1 : 2007

mechanical data

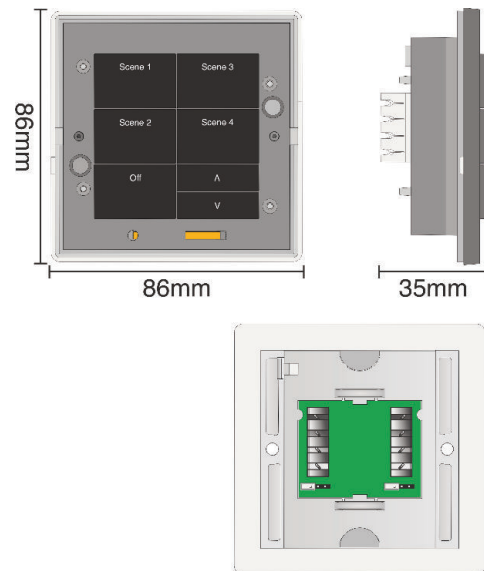

Standard button configurations & part numbers

<table><tr><td>Scene 1</td><td>Scene 3</td></tr><tr><td>Scene 2</td><td>Scene 4</td></tr><tr><td>Off</td><td>A</td></tr><tr><td></td><td>V</td></tr></table> <p>WK-MOD-070</p>	Scene 1	Scene 3	Scene 2	Scene 4	Off	A		V	<table><tr><td>Scene 1</td><td>Scene 3</td></tr><tr><td>Scene 2</td><td>Scene 4</td></tr><tr><td>Off</td><td>On</td></tr><tr><td></td><td>Off</td></tr></table> <p>WK-MOD-072</p>	Scene 1	Scene 3	Scene 2	Scene 4	Off	On		Off	<table><tr><td>Scene 1</td><td>Scene 5</td></tr><tr><td>Scene 2</td><td>Scene 6</td></tr><tr><td>Scene 3</td><td>Scene 7</td></tr><tr><td>Scene 4</td><td>Scene 8</td></tr><tr><td>Off</td><td>A</td></tr><tr><td></td><td>V</td></tr></table> <p>WK-MOD-110</p>	Scene 1	Scene 5	Scene 2	Scene 6	Scene 3	Scene 7	Scene 4	Scene 8	Off	A		V	<table><tr><td>Scene 1</td><td>Scene 1</td></tr><tr><td>Scene 2</td><td>Scene 2</td></tr><tr><td>Scene 3</td><td>Scene 3</td></tr><tr><td>Scene 4</td><td>Scene 4</td></tr><tr><td>Off</td><td>Off</td></tr></table> <p>WK-MOD-103</p>	Scene 1	Scene 1	Scene 2	Scene 2	Scene 3	Scene 3	Scene 4	Scene 4	Off	Off	<table><tr><td>Scene 1</td><td>Open</td></tr><tr><td>Scene 2</td><td>●</td></tr><tr><td>Scene 3</td><td>Close</td></tr><tr><td>Scene 4</td><td></td></tr><tr><td>Off</td><td>A</td></tr><tr><td></td><td>V</td></tr></table> <p>WK-MOD-101</p>	Scene 1	Open	Scene 2	●	Scene 3	Close	Scene 4		Off	A		V	<table><tr><td>1</td><td>5</td></tr><tr><td>2</td><td>6</td></tr><tr><td>3</td><td>7</td></tr><tr><td>4</td><td>8</td></tr><tr><td>All</td><td>Open</td></tr><tr><td></td><td>Close</td></tr></table> <p>WK-MOD-111</p>	1	5	2	6	3	7	4	8	All	Open		Close
Scene 1	Scene 3																																																																		
Scene 2	Scene 4																																																																		
Off	A																																																																		
	V																																																																		
Scene 1	Scene 3																																																																		
Scene 2	Scene 4																																																																		
Off	On																																																																		
	Off																																																																		
Scene 1	Scene 5																																																																		
Scene 2	Scene 6																																																																		
Scene 3	Scene 7																																																																		
Scene 4	Scene 8																																																																		
Off	A																																																																		
	V																																																																		
Scene 1	Scene 1																																																																		
Scene 2	Scene 2																																																																		
Scene 3	Scene 3																																																																		
Scene 4	Scene 4																																																																		
Off	Off																																																																		
Scene 1	Open																																																																		
Scene 2	●																																																																		
Scene 3	Close																																																																		
Scene 4																																																																			
Off	A																																																																		
	V																																																																		
1	5																																																																		
2	6																																																																		
3	7																																																																		
4	8																																																																		
All	Open																																																																		
	Close																																																																		
<table><tr><td>On</td><td>A</td></tr><tr><td>Off</td><td>V</td></tr></table> <p>WK-MOD-040</p>	On	A	Off	V	<table><tr><td>On</td><td>On</td></tr><tr><td>Off</td><td>Off</td></tr></table> <p>WK-MOD-041</p>	On	On	Off	Off	<table><tr><td>On</td><td></td></tr><tr><td>Off</td><td></td></tr></table> <p>WK-MOD-020</p>	On		Off		<table><tr><td>Open</td><td>Open</td></tr><tr><td>●</td><td>●</td></tr><tr><td>Close</td><td>Close</td></tr></table> <p>WK-MOD-060</p>	Open	Open	●	●	Close	Close	<table><tr><td>Open</td><td></td></tr><tr><td>●</td><td></td></tr><tr><td>Close</td><td></td></tr></table> <p>WK-MOD-030</p>	Open		●		Close																																								
On	A																																																																		
Off	V																																																																		
On	On																																																																		
Off	Off																																																																		
On																																																																			
Off																																																																			
Open	Open																																																																		
●	●																																																																		
Close	Close																																																																		
Open																																																																			
●																																																																			
Close																																																																			

telephone +44 (0) 1634 226666 fax +44 (0) 1634 226667 www.rakocontrols.com

WE RESERVE THE RIGHT TO CHANGE THE SPECIFICATION AND DATA HEREWITH WITHOUT NOTICE.

© 2022 RAKO CONTROLS LIMITED