


# Silent Fan

- NEW - Now with stylish open front models
- From only 12dB(A)
- IPX5 - Zone 1 rated
- Meets current Building Regulations Approved Document F and L
- 2 speeds to choose from at installation
- Back draught shutters included
- High efficiency motor
- 2 year warranty
- Suitable for wall, ceiling, window and panel mounting



## Silent Fan Axial Bathroom/Toilet Fan

The new Silent Fan Range from Vent-Axia not only delivers stylish and silent ventilation without compromise on performance, but now comes with even more features and more model options providing flexibility when choosing the right fan.

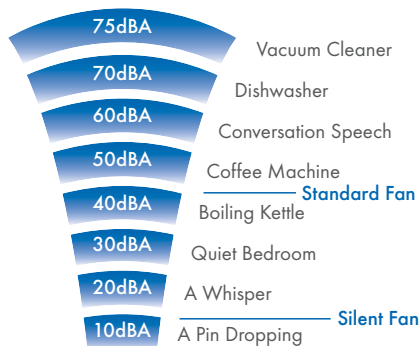

## PIR Model

### Zone 1 Fixed Speed, Intermittent, PIR

Motion detection, presence infrared motion control with overrun timer adjustable 5-30min. Single speed.

|                           |           |
|---------------------------|-----------|
| Model                     | Stock Ref |
| VASF100PIRO (open grille) | 495705    |

## Accessories

|   |           |
|---|-----------|
| Model   | Stock Ref |
| Window Kit  | 442947    |
| Wall Kit White                                    | 254102    |
| Wall Kit Brown                                    | 254100    |
| Internal Fit Wall Kit White + Backdraught Shutter | 474779    |

## Models

### Zone 1 Fixed Speed, Intermittent

Remote or light switch operation. 2 speed options selectable at install. Intermittent operation.

|                          |           |
|--------------------------|-----------|
| Model                    | Stock Ref |
| VASF100B (closed grille) | 446658B   |
| VASF100BO (open grille)  | 495697    |

### Zone 1 Fixed Speed, Intermittent, Timer

Overrun timer adjustable 5-30 min. 2 speed options selectable at install. Intermittent operation.

|                          |           |
|--------------------------|-----------|
| Model                    | Stock Ref |
| VASF100T (closed grille) | 446659B   |
| VASF100TO (open grille)  | 495698    |



### Zone 1 Fixed Speed, Intermittent, Humidity Timer

Humidity controlled with fixed 15 min timer overrun. 2 speed options selectable at install. Intermittent operation.



|                           |           |
|---------------------------|-----------|
| Model                     | Stock Ref |
| VASF100HT (closed grille) | 477436B   |
| VASF100HTO (open grille)  | 495699    |

# Dimensions (mm)

Closed Grille

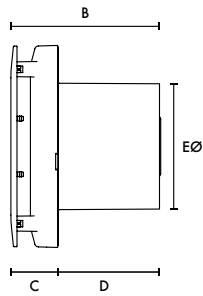

Open Grille

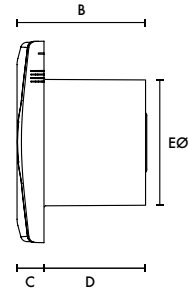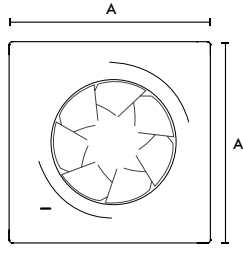


| Grille | A   | B   | C  | D  | EØ |
|--------|-----|-----|----|----|----|
| Closed | 160 | 117 | 37 | 80 | 99 |
| Open   | 160 | 117 | 22 | 80 | 99 |

Weight 0.7kg


# Performance Guide

Closed Grille

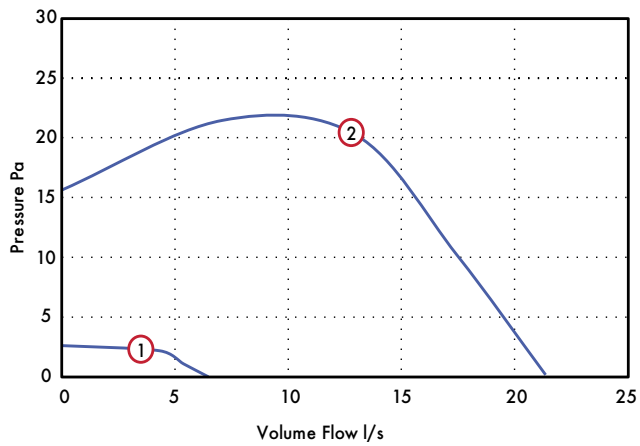

|         | Model       | Speed  | l/s | Watts | Warranty (years) |
|---------|-------------|--------|-----|-------|------------------|
| 2 Speed | VASF100B/T/ | 1 Low  | 6   | 2.7   | 2                |
|         | HT          | 2 High | 21  | 4.8   |                  |

Open Grille

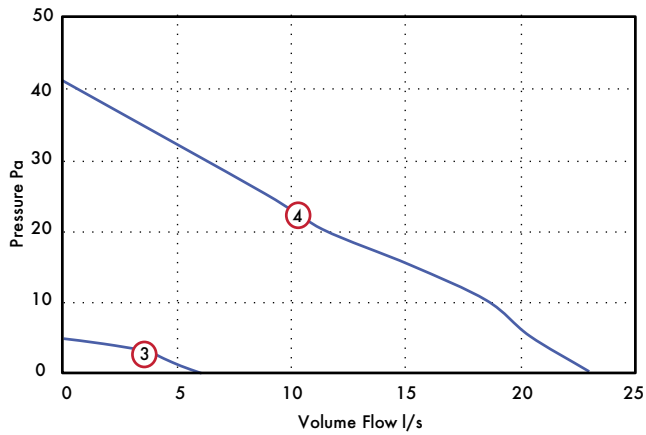

|         | Model      | Speed  | l/s | Watts | Warranty (years) |
|---------|------------|--------|-----|-------|------------------|
| 2 Speed | VASF100BO/ | 3 Low  | 6   | 2.7   | 2                |
|         | TO/HTO/    | 4 High | 23  | 4.8   |                  |
|         | PIRVO      |        |     |       |                  |