



## AiQ/DALI/0/1-10V

Smart-DALI - DALI 0/1-10V Signal  
Generator & Relay



### PRODUCT FEATURES

- DALI 0/1-10V Converter
- Creates & Converts Smart Signals Into DALI Or 0/1-10V Signals
- Compatible With All iQ Devices
- DALI Addressable And Able To Be Grouped
- DALI Broadcast Mode
- RGBW & CCT DALI Control Output
- Can Be Used With Or Without Inbuilt Relay
- For 0/1-10V Simply Set DIP Switch 10 To Down
- Can Be Used Independently Or In Conjunction With A Smart Hub\*

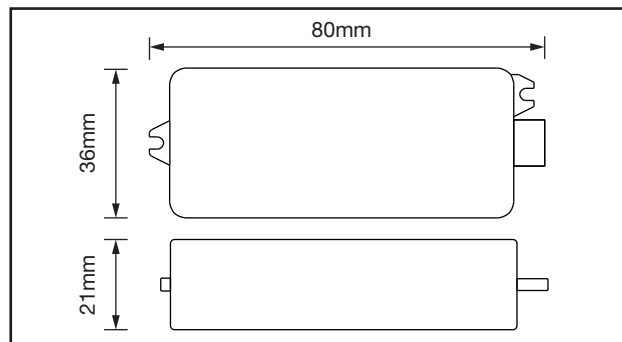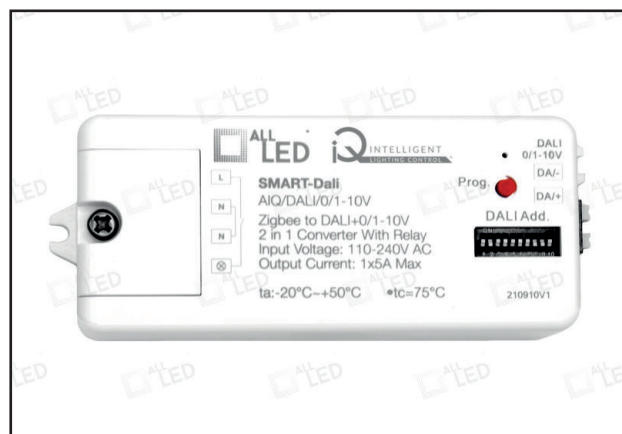

### TECHNICAL SPECIFICATIONS

PRODUCT CODE		AiQ/DALI/0/1-10V	
Input	Power	110-240 VAC	
	Transmission Frequency	Zigbee 2.4GHz	
Output, DALI	DALI PS Current	Max. 50mA	
	DALI Current Consumption	Max 4mA	
Output, 0/1-10V	Current	Max. 20mA	
Output, Relay	Switching Voltage	110-240VAC	
	Current	Max. 5A	
Environment	Operating Temperature	-20°C ~ +50°C	
	Relative Humidity	8% to 80%	

