


## TKS 32

Membrane cable entrie with strain relief

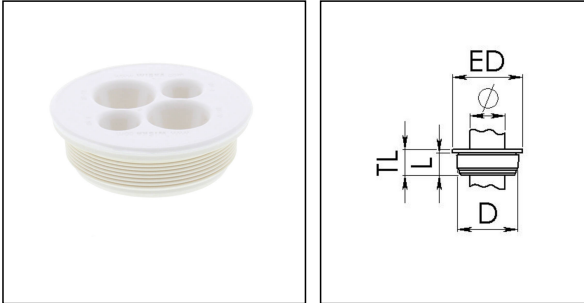

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

<b>Material</b>	Polypropylene
<b>Material membrane</b>	TPE
<b>Temp. range min</b>	-30 °C
<b>Temp. range max</b>	80 °C
<b>Glow wire test</b>	960 °C
<b>Protection class</b>	IP66
<b>Ø Connection thread D</b>	32
<b>Ø cable diameter min</b>	4 mm
<b>Ø cable diameter max</b>	12 mm
<b>External diameter ED</b>	37 mm
<b>Total length TL</b>	12 mm
<b>Ø Drilling</b>	32 mm
<b>Product Color</b>	RAL 9001
<b>Order no. RAL 9001</b>	10108617
<b>Type</b>	TKS 32
<b>Packing unit</b>	10
<b>ETIM-Classification</b>	EC000451

Remarks:

- Flammability: UL94-V0
- for cable entries 2 x 7-12mm + 2 x 4-8mm

14.07.2019


Your Contact:

**WISKA UK Ltd.**

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

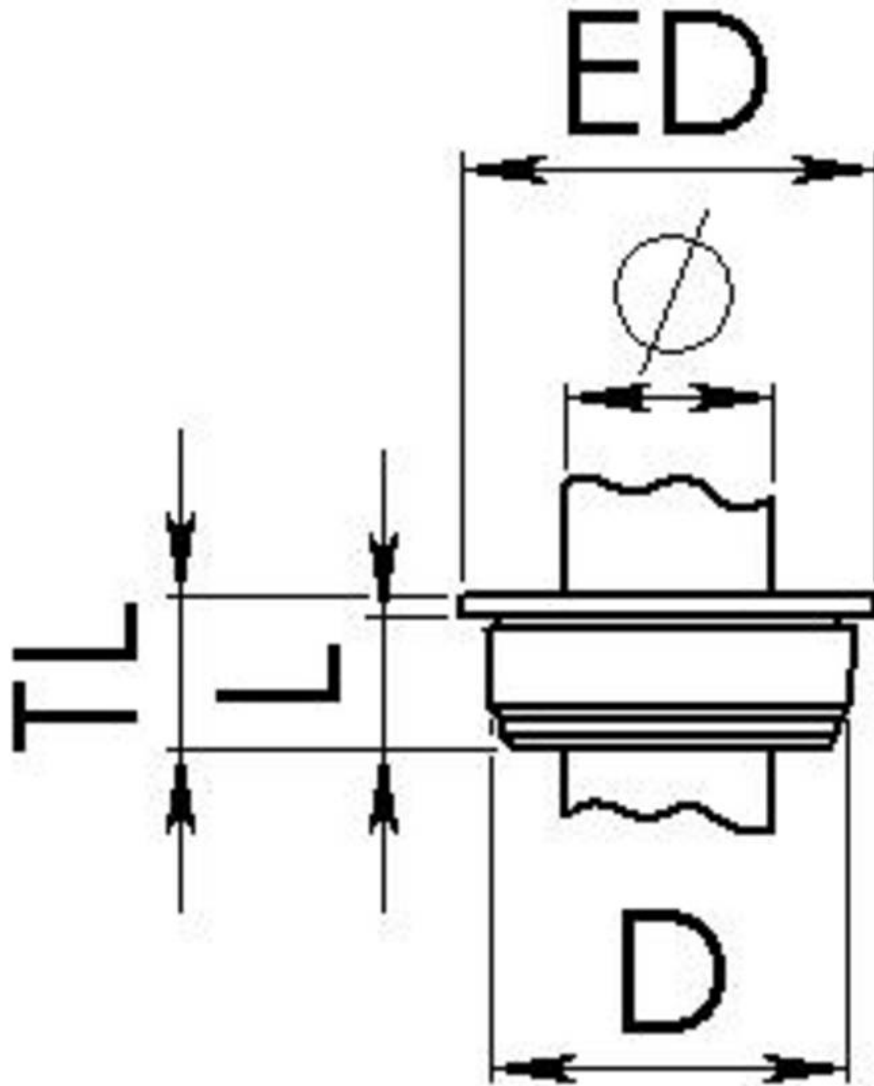

Your Contact:

**WISKA UK Ltd.**

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice