

LIVE Miniature Circuit Breaker - 3 pole

ELECTRICAL


Product Code - CB3__B/C/D



Technical Data

Rated Current (I_N): 6A, 10A, 16A, 20A, 25A, 32A, 40A, 50A, 63A.
 Rated Voltage (U_e): 230/400V AC
 Insulation Voltage U_i : 500V
 Breaking Capacity (I_{cn}): 10kA
 Impulse Withstand Voltage: 4000V
 Dielectric Test Voltage Frq for 1 min (kV): 2
 Contact Position Degree: IP20
 Ambient Temperature: $-5 < 40^\circ\text{C}$
 Box qty: 12
 Tripping Characteristic: B, C, D
 Electrical Endurance: 8,000 Cycles
 Mechanical Endurance: 20,000 Cycles
 Complies with BS EN 60898-1

Layout Drawing

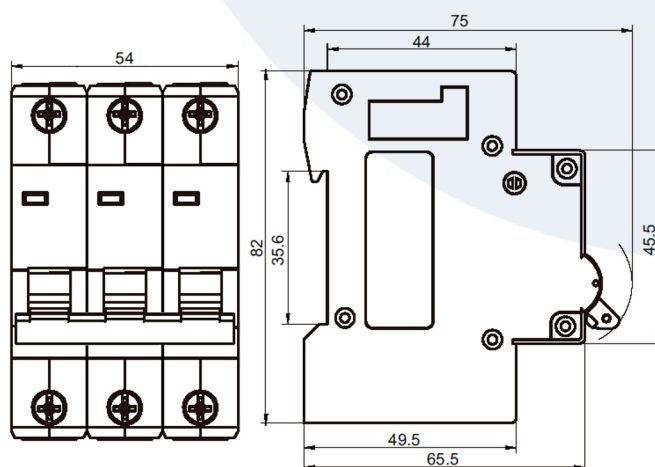

Features

CB range of MCB's have a breaking capacity of 10kA and current rating from 6A to 63A. They are available in B, C and D curves.

Switching and Isolating;
 Overload and short circuit protection.

Curves

