



## 13AMP SOCKET OUTLETS

### Standards, Approvals & Directives

Complies with BS 1363-2: 1995 (Amd 1-3)

Independent test certificates are held as follows:

- Panel Mounted 1 gang switched and unswitched and 2 gang switched socket outlets - Certificate No: C12/43399-1

### Description:

13amp sockets available as single or double and switched or unswitched.

### Features:

- Terminals markings present on housing for clearer identification.
- Switch contacts with silver contacts on both surfaces for good continuity.
- Switched socket outlets have double insulated rockers.

### Finishes:


All 13amp sockets are available with our complete range of plate finishes: Unlacquered Brass, Antique Bronze, Stainless Steel, Polished Nickel, Perspex and Painted.

Matching metal rocker switches available on all switched versions.

Sockets inserts are available in black and white.

Technical Specification	
Supply Voltage:	250V AC
Current Rating:	13A per Socket Outlet
Terminal Capacity:	Live, Neutral & Earth 3 x 2.5mm <sup>2</sup> 3 x 4mm <sup>2</sup> 2 x 6mm <sup>2</sup> (stranded)
Ambient Operating Temperature:	-5°C to +40°C
IP Rating:	IP2XD
Max Installation Altitude:	2000 meters


**13AMP SOCKET OUTLETS**

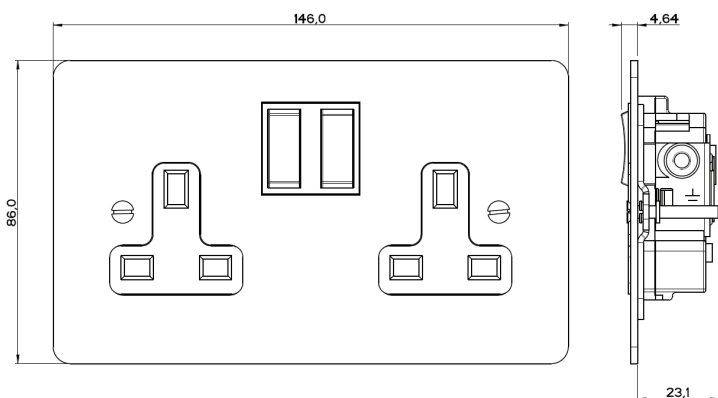

**13Amp Twin Switched Socket Outlet**

**Depth:**  
 Twin Un-Switched Socket – 23mm  
 Twin Switched Socket – 23mm  
 Twin Switched Neon Socket – 23mm

**Recommended Box Depth:**  
 35mm Minimum  
 Metal boxes to BS4662

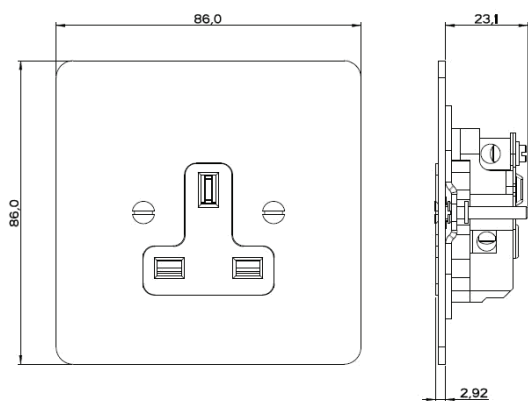

**13Amp Single Unswitched Socket Outlet**

**Depth:**  
 Single Un-Switched Socket – 23mm  
 Single Switched Socket – 23mm  
 Single Switched Neon Socket – 23mm

**Recommended Box Depth:**  
 35mm Minimum  
 Metal boxes to BS4662