

Type A mini RCBO Single Module




Features

- Switching and isolation
- Overload and short circuit protection
- Protection against the effects of sinusoidal alternation earth fault currents
- Indirect and direct contacts protection
- Protection against fire hazard caused by insulation faults.

Technical Data

- Rated current (In): 6A, 10A, 16A, 20A, 25A, 32A, 40A
- Rated voltage (Ue): 230V AC
- Breaking capacity (Icn): 6kA
- Rated residual current: 30mA, 100mA
- Tripping characteristic: B
- Electrical endurance: 4000 cycles
- Mechanical endurance: 100000 cycles
- Complies with BS EN 61009-1

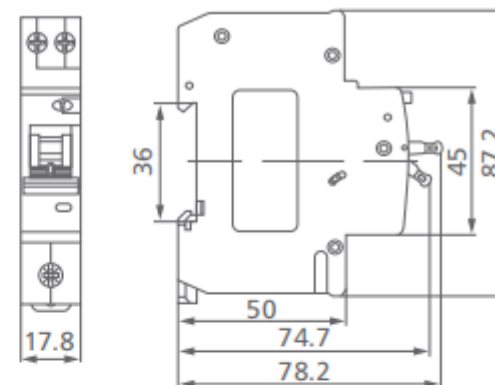

Part No.	Description	Box Qty
RSA106B	Type A Single Module 6Amps B Curve 30mA RCBO	50
RSA110B	Type A Single Module 10Amps B Curve 30mA RCBO	50
RSA116B	Type A Single Module 16Amps B Curve 30mA RCBO	50
RSA120B	Type A Single Module 20Amps B Curve 30mA RCBO	50
RSA132B	Type A Single Module 32Amps B Curve 30mA RCBO	50
RSA140B	Type A Single Module 40Amps B Curve 30mA RCBO	50