

# Conduit Wiring Cable PVC 6491X

A 450/750 Volt industrial fixed wiring cable with PVC insulation, for use in conduit or trunking. The cable may also be used inside fixed protected installations such as light fittings, appliances and switchgear.

## CONSTRUCTION


Single core plain copper conductor solid or stranded, PVC insulated only. Insulation colours Brown, Blue, Black, Green / Yellow, Grey.

## TECHNICAL DATA

BS EN 50525-2-31 H07V-R

Nominal Voltage	450/750V
Test Voltage	3000V
Operating Temperature	-15°C to +70°C
Bending Radius	≤10mm <sup>2</sup> 3 x O/D 10mm <sup>2</sup> - 25mm <sup>2</sup> 4 x O/D 25mm <sup>2</sup> + 5 x O/D
Flame Propagation	BS EN 60332-1-2
Current Rating Table	4D1A & 4D1B

NOTES: Minimum installation temperature 5°C

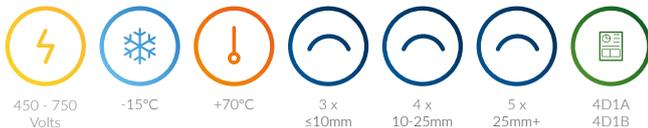

When installed in an earthed metal enclosure, cables are suitable for voltages up to 1000V A.C. or up to 750V to earth D.C.

## PVC 6491X DIMENSIONS

Cores x mm <sup>2</sup>	Nom OD mm	Weight kg / km
1.5	3.0	22
2.5	3.6	33
4.0	4.1	49
6.0	4.6	69
10.0	5.9	115
16.0	6.9	174
25.0	8.6	268
35.0	10.2	376
50.0	11.8	509
70.0	13.6	716
95.0	15.9	988
120.0	17.5	1226
150.0	19.5	1505
185.0	21.8	1895
240.0	24.8	2465
300.0	27.7	3080
400.0	31.1	3945
500.0	34.2	4950
630.0	38.4	6295

# CONDUIT WIRING CABLE PVC 6491X

**Table 4D1A**

**Single core 70°C thermoplastic insulated cables, nonarmoured with or without sheath ( Copper Conductors)**

CURRENT-CARRYING CAPACITY (amperes):

Ambient temperature: 30°C  
Conductor operating temperature: 70°C

Conductor Cross sectional area	Reference Method A (enclosed in conduit in thermally insulating wall etc.)		Reference Method B (enclosed in conduit on a wall or in trunking etc.)		Reference Method C (clipped direct)		Reference Method F (in free air or on a perforated cable tray horizontal or vertical)					
	2 cables single phase a.c. or d.c.	3 or 4 cables three phase a.c.	2 cables single phase a.c. or d.c.	3 or 4 cables single phase a.c. or d.c.	2 cables single phase a.c. or d.c. flat and touching	3 or 4 cables three phase a.c. or d.c. flat and touching or trefoil	Touching			Spaced by one diameter		
							2 cables single phase a.c. or d.c. flat	3 cables three phase a.c. flat	3 cables three phase a.c. trefoil	2 cables, single-phase a.c. or d.c. or 3 cables three phase a.c. flat	Horizontal	Vertical
1	2	3	4	5	6	7	8	9	10	11	12	
(mm <sup>2</sup> )	(A)	(A)	(A)	(A)	(A)	(A)	(A)	(A)	(A)	(A)	(A)	(A)
1	11	10.5	13.5	12	15.5	14	-	-	-	-	-	-
1.5	14.5	13.5	17.5	15.5	20	18	-	-	-	-	-	-
2.5	20	18	24	21	27	25	-	-	-	-	-	-
4	26	24	32	28	37	33	-	-	-	-	-	-
6	34	31	41	36	47	43	-	-	-	-	-	-
10	46	42	57	50	65	59	-	-	-	-	-	-
16	61	56	76	68	87	79	-	-	-	-	-	-
25	80	73	101	89	114	104	131	114	110	146	130	
35	99	89	125	110	141	129	162	143	137	181	162	
50	119	108	151	134	182	167	196	174	167	219	197	
70	151	136	192	171	234	214	251	225	216	281	254	
95	182	164	232	207	284	261	304	275	264	341	311	
120	210	188	269	239	330	303	352	321	308	396	362	
150	240	216	300	262	381	349	406	372	356	456	419	
185	273	245	341	296	436	400	463	427	409	521	480	
240	321	286	400	346	515	472	546	507	485	615	569	
300	367	328	458	394	594	545	629	587	561	709	659	
400	-	-	546	467	694	634	754	689	656	852	795	
500	-	-	626	533	792	723	868	789	749	982	920	
630	-	-	720	611	904	826	1005	905	855	1138	1070	
800	-	-	-	-	1030	943	1086	1020	971	1265	1188	
1000	-	-	-	-	1154	1058	1216	1149	1079	1420	1337	

NOTES: \* Spacing larger than one diameter will result in larger voltage drop.

# CONDUIT WIRING CABLE PVC 6491X

**Table 4D1B**

VOLTAGE DROP (per ampere per metre) Conductor operating temperature: 70°C

Conductor Cross sectional area	2 cables d.c.	2 cables, single phase a.c.						3 or 4 cables, three-phase a.c.														
		Reference Methods A & B (enclosed in conduit or trunking)			Reference Method C & F (clipped direct, on tray or in free air)			Reference Methods A & B (enclosed in conduit or trunking)			Reference Methods C & F (clipped direct, on tray or in free air)											
					Cables touching		Cables spaced*				Cables touching, trefoil		Cables touching, flat	Cables spaced *flat								
1	2	3			4			5			6			7			8			9		
(mm <sup>2</sup> )	(mV/A/m)	(mV/A/m)			(mV/A/m)			(mV/A/m)			(mV/A/m)			(mV/A/m)			(mV/A/m)			(mV/A/m)		
1	44	44			44			44			38			38			38			38		
1.5	29	29			29			29			25			25			25			25		
2.5	18	18			18			18			15			15			15			15		
4	11	11			11			11			9.5			9.5			9.5			9.5		
6	7.3	7.3			7.3			7.3			6.4			6.4			6.4			6.4		
10	4.4	4.4			4.4			4.4			3.8			3.8			3.8			3.8		
16	2.8	2.8			2.8			2.8			2.4			2.4			2.4			2.4		
		r	x	y	r	x	y	r	x	y	r	x	y	r	x	y	r	x	y	r	x	y
25	1.75	1.80	0.33	1.80	1.75	0.20	1.75	1.75	0.29	1.8	1.50	0.29	1.55	1.50	0.175	1.50	1.50	0.25	1.55	1.50	0.32	1.55
35	1.25	1.30	0.31	1.30	1.25	0.195	1.25	1.25	0.28	1.3	1.10	0.27	1.10	1.10	0.170	1.10	1.10	0.24	1.10	1.10	0.32	1.15
50	0.93	0.95	0.30	1.00	0.93	0.190	0.95	0.93	0.28	0.97	0.81	0.26	0.85	0.80	0.165	0.82	0.80	0.24	0.84	0.80	0.32	0.86
70	0.63	0.65	0.29	0.72	0.63	0.185	0.66	0.63	0.27	0.69	0.56	0.25	0.61	0.55	0.160	0.57	0.55	0.24	0.60	0.55	0.31	0.63
95	0.46	0.49	0.28	0.56	0.47	0.180	0.50	0.47	0.27	0.54	0.42	0.24	0.48	0.41	0.155	0.43	0.41	0.23	0.47	0.40	0.31	0.51
120	0.36	0.39	0.33	0.47	0.37	0.175	0.41	0.37	0.26	0.45	0.33	0.23	0.41	0.32	0.150	0.36	0.32	0.23	0.40	0.32	0.30	0.44
150	0.29	0.31	0.31	0.41	0.30	0.175	0.34	0.29	0.26	0.39	0.27	0.23	0.36	0.26	0.150	0.3	0.26	0.23	0.34	0.26	0.30	0.40
185	0.23	0.25	0.30	0.37	0.24	0.170	0.29	0.24	0.26	0.35	0.22	0.23	0.32	0.21	0.145	0.26	0.21	0.22	0.31	0.21	0.30	0.36
240	0.18	0.195	0.29	0.33	0.185	0.165	0.25	0.185	0.25	0.31	0.17	0.23	0.29	0.160	0.145	0.22	0.160	0.22	0.27	0.160	0.29	0.34
300	0.145	0.160	0.28	0.31	0.150	0.165	0.22	0.150	0.25	0.29	0.14	0.23	0.27	0.130	0.140	0.190	0.130	0.22	0.25	0.130	0.29	0.32
400	0.105	0.130	0.27	0.29	0.120	0.160	0.20	0.115	0.25	0.27	0.12	0.22	0.25	0.105	0.140	0.175	0.105	0.21	0.24	0.100	0.29	0.31
500	0.086	0.110	0.27	0.28	0.098	0.155	0.185	0.093	0.24	0.26	0.10	0.22	0.25	0.086	0.135	0.160	0.086	0.21	0.23	0.081	0.29	0.3
630	0.068	0.094	0.27	0.27	0.081	0.155	0.175	0.076	0.24	0.25	0.08	0.22	0.24	0.072	0.135	0.150	0.072	0.21	0.22	0.066	0.28	0.29
800	0.053	-	0.26	-	0.068	0.150	0.165	0.061	0.24	0.25	-	-	-	0.060	0.130	0.145	0.060	0.21	0.22	0.053	0.28	0.29
1000	0.042	-	0.26	-	0.059	0.150	0.160	0.050	0.24	0.24	-	-	-	0.052	0.130	0.14	0.052	0.20	0.21	0.044	0.28	0.28

Permission to reproduce extracts from BS 7671:2008+A 1:2011 is granted by the British Standards Institution (BSI) and the Institution of Engineering and Technology (IET). No other use of this material is permitted. BS 7671:2008 Incorporating Amendment No 1:2011 can be purchased from the IET website <http://electrical.theiet.org/> and the BSI online shop: <http://shop.bsigroup.com>