



221 SeriesThe Way to Connect!

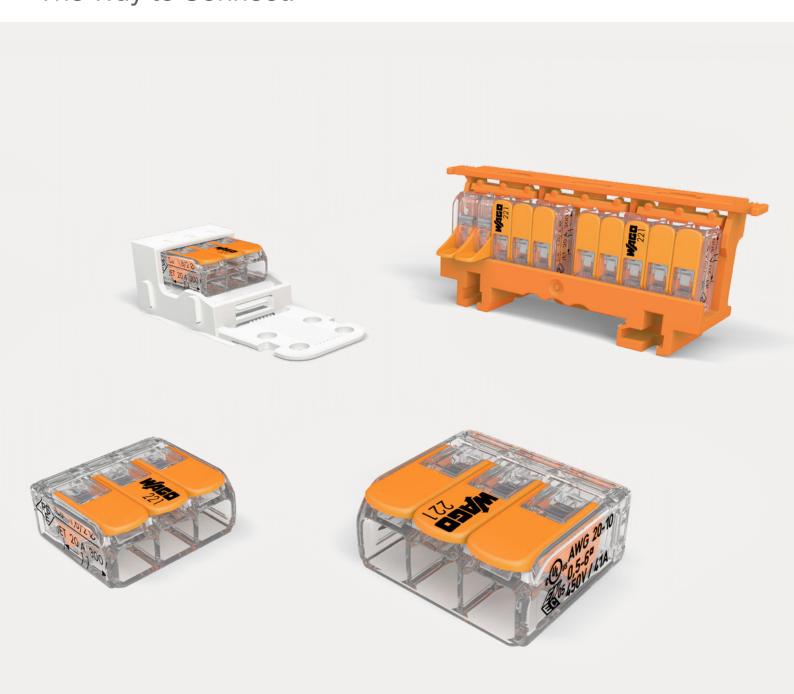

WAGO 221

COMPACT Splicing Connectors for All Conductor Types

4 mm² variant



- Continuous service temperature: max. 105°C
- Ambient temperature: max. 85°C (T85)











Carrier					
	Description	Item No.	Pack. Unit		
	Strain relief plate; for 221-500 Mounting Carrier	222-505	1		
101 11 101	Mounting carrier; for 2-, 3- and 5-wire connectors; 4 mm² variant	221-500	1		
	Angled DIN-rail adapter; for horizontal mounting of 221-500 carrier on DIN-35 rail	222-510	1		
101111111	Mounting carrier; for 2-, 3- and 5-wire connectors; 6 mm² variant	221-510	1		

	0.14 4 mm ² 0.2 4 mm ²	450 V / 4 kV / 2 32 A		
		Description	Item No.	Pack. Unit
		2-wire connectors	221-412	100
		3-wire connectors	221-413	50
		5-wire connectors	221-415	25
	6 mm² variant			
	0.5 6 mm²	450 V / 4 kV / 2 41 A		
		Description	Item No.	Pack. Unit
NEW		2-wire connectors	221-612	50
		3-wire connectors	221-613	40
		5-wire connectors	221-615	20
	Carrier			
NEW		Description	Item No.	Pack. Unit
		Mounting carrier; for 2-wire connectors; for screw mounting	221-502	1
		Mounting carrier; for 3-wire connectors; for screw mounting	221-503	1
		Mounting carrier; for 5-wire connectors;	221-505	1



Two test slots



Industry's widest range of conductor sizes

Combine any type and size of conductors



for screw mounting

Transparent housing

· Clearly identify if the conductor has been stripped and inserted properly