


Sollysta White Moulded 13A Double Pole Key Switch Socket with LED Indicator

Ensures that power cannot be turned on or off without the removeable key, making it an ideal solution for communal areas.

The Sollysta Moulded range of wiring accessories has evolved to meet the requirements in domestic and commercial markets, with innovations such as the unique safety shutter mechanism requiring all three pins to be inserted to activate the shutter on all 13A socket outlets for safety, and all screw terminals facing the same way for ease of installation.

Our Sollysta White Moulded Key Switch Socket with LED Indicator has been designed to meet the requirements for sockets in communal areas preventing any unauthorised use. The uniquely designed socket is integrated with an emergency light/fish key switch for controlling the power of the socket, ensuring only authorised users have access. Along with a LED indicator the authorised user can be made aware of the power status.

Common with all Sollysta switched sockets, double pole in construction and the Sollysta patented 3 pin safety shutter system. With its slim profile the socket can easily fit a 25mm back box.

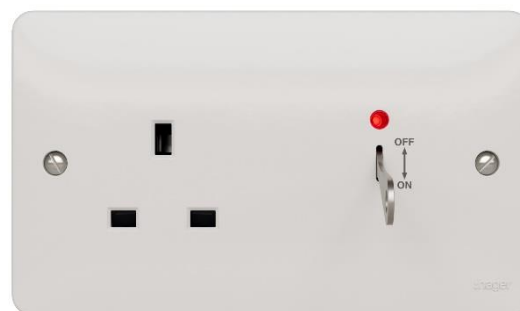


WMS812LN



Description	Cat ref.
Sollysta 13A Double Pole Key Switch Socket with LED Indicator	WMS812LN

Technical characteristics

Architecture	
Fixing mode:	flush-mounting
Main electrical features	
Nominal voltage:	250 V
Rated voltage:	220...230 V AC
Rated current:	13 A
Dimensions	
Depth:	26 mm
Height:	86 mm
Width:	146 mm
Cover, door	
Cover:	Full cover plate
Materials	
Colour:	white
Material:	Urea-formaldehyde
Surface appearance:	glossy
Type of surface treatment:	untreated
Colour syntax:	Colour white
Installation, mounting	
Imprint:	without imprint
Connection	
Type of connection:	screw
Cable	
Wiring:	with earth connection
Scope of delivery	
Component:	with 2 fixing screws M3.5 x 30 mm
Safety	
Protection index IP:	IP20
Protection:	Enhanced contact protection
Identification	
Designation syntax:	Core
designation/function:	socket outlet

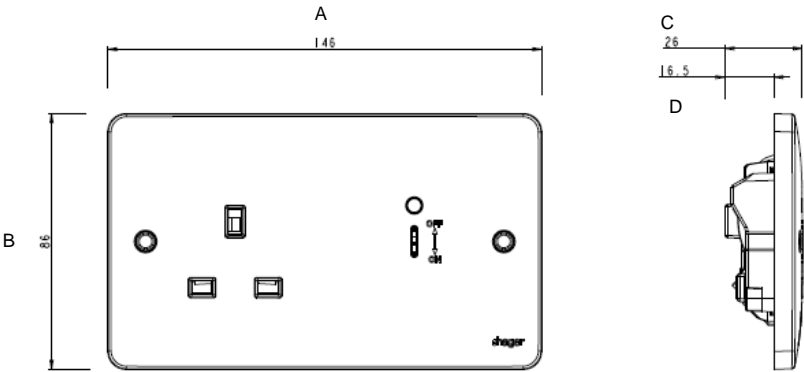

Dimensions

Catalogue Reference	A (mm)	B (mm)	C (mm)	D (mm)
WMS812LN	146	86	26	16.5

Mounting Depth

Range	Part Reference	Min Mounting Depth
White Moulded	WMS812LN	25mm