
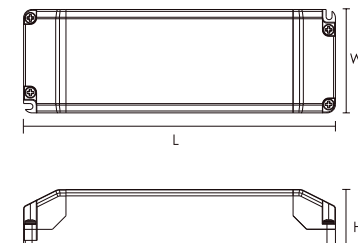


Constant Voltage 12V LED Driver

Features:

- Independent compact design
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II
- Non-Dimmable



Parameters:

Model No.	Input voltage (V)	Output voltage (V)	Output current (A)	Power factor (λ)	Ambient temperature ta (°C)	Max. casing temperature tc (°C)	Type of light source for which it is intended	Efficiency full load (%)	No-load power (Pno in W)	Standby power (Psb in W)	Suit for dimming (Y/N)	Networked standby power (Pnet in W)	For OLED and HL Maxmium output power (W)	Max. output (W)	Dimensions LxWxH (mm)	Weight (g)
43810	220-240	12	0-1.0	0.80	-20...+50	80	LED	80	N/A	N/A	N	N/A	N/A	12	98x39x22	60
47989	220-240	12	0-1.7	0.80	-20...+50	80	LED	82	N/A	N/A	N	N/A	N/A	20	113x44x28	100
79335	220-240	12	0-5.0	0.95	-20...+50	85	LED	88	N/A	N/A	N	N/A	N/A	60	184x61x32	270