




Stag Clip Single




Stag Clip Twin

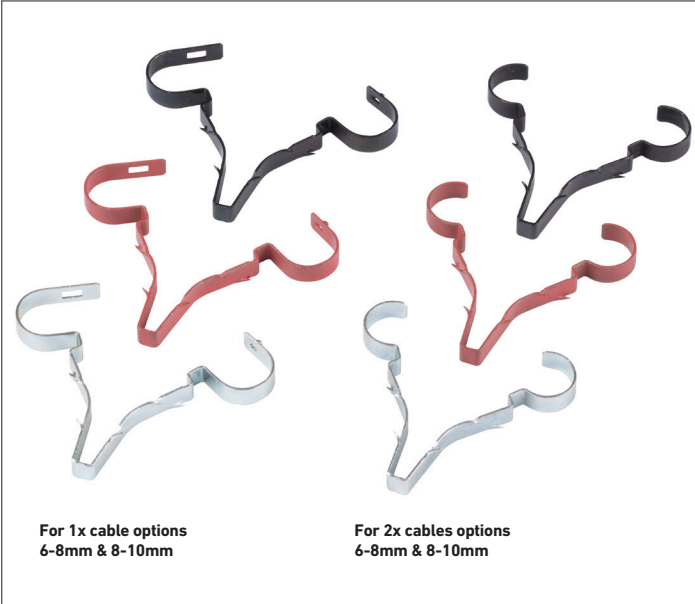

For 1x cable options
6-8mm & 8-10mm

For 2x cables options
6-8mm & 8-10mm

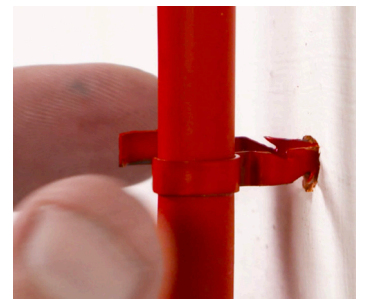


Drill pilot hole & select
appropriate size of Stag Clip



Rest Stag Clip in the pilot hole
ready to accept cable(s)



Insert cable(s) before
squeezing the smooth head

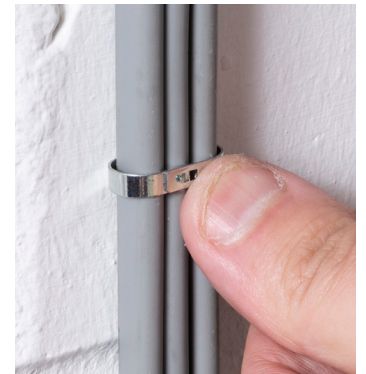

Push home to secure the
Stag Clip and cable(s)

Safe-D Stag Clips can be first-fixed with their lower barbs gripping in pilot-holes, ready for second-fix cabling works.

- >1200°C melting point
- Can be 1st fix rested in pilot hole, before 2nd fix inserting cable(s)
- No screw required, simply push smooth head in pilot hole, 5.5mm or 6mm x 30mm deep*
- Head sections overlap for secure cable fitment. 2x cable versions lock together when overlapped
- Ideal for FP & MICC cables, T&E and flexes
- Supplied in boxed quantity of 100 pcs (bags of 50 pcs on request)

