


**Safe-D U-clips can be fitted direct-to-surface, or in non-metallic trunking systems. All can be secured to substrates by shot-fired nails or screw-fixings.**



After cables are inserted, tabs can be folded inwardly to safely secure the cables. They are produced from a specified steel with >1200°C melting point.

The combination of the pliable gauge steel & rounded corner features makes Safe-D U-Clips quick & easy to install. Three sizes are available to fit trunkings from 25mm width up to 50mm wide bases, or direct-to-surface.

- Certified for 2 hours at 970°C
- Compliant with BS7671 and BS5839-1 requirements
- Thumb friendly, easy fold side-tabs
- Ideal for ceiling voids, or popular PVC trunking
- Rounded edges for easy handling
- Red U-Clips are popular for fixing direct to surface
- Supplied in bags of 100 pcs

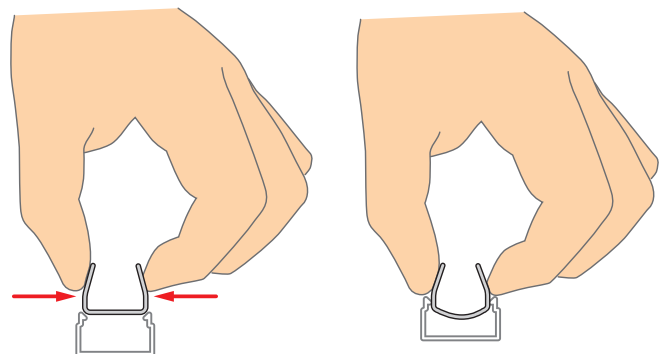

**When inserting U-Clip 30 in 25x16mm trunkings, gently squeezing the upright tabs causes the base to compress for tight fitment in Size 2 trunkings.**

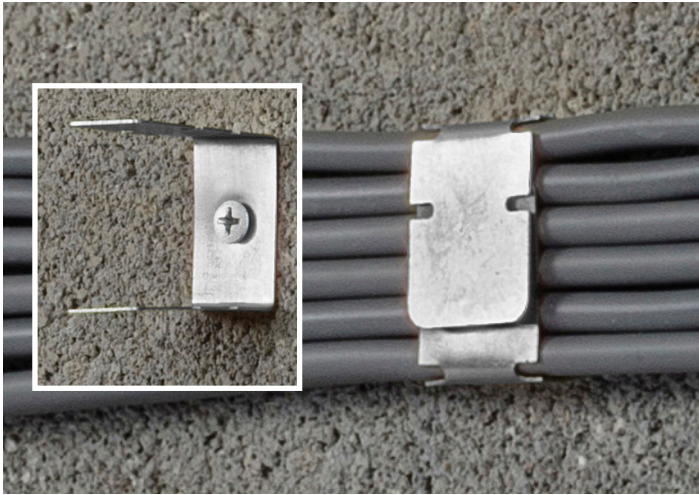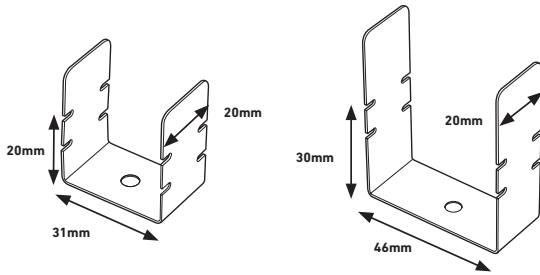

**Safe-D U-Clip 40 is ideal for fitment in 38mm or 40mm non-metallic trunking bases, or to provide a first-fix solution for securing cables direct to surfaces.**

Safe-D U-Clip 50 Clips are popular for fitment in 50mm non-metallic trunking bases, or to provide a first-fix solution for securing cables direct to surfaces.

Installers should use a fire-rated fixing, such as D-Line D-Fixings, and then simply fold-over tabs to secure cables.

**1st fix clips, then 2nd fix cables!**

- Certified for 2 hours at 970°C
- Compliant with BS7671 and BS5839-1 requirements
- Thumb friendly, easy fold side-tabs
- Ideal for ceiling voids, or popular PVC trunking
- Rounded edges for easy handling
- Supplied in bags of 50 pcs

