

## E-drive for Free flap 1.7 or Free flap 3.15, supplementary set



- > Installation: e-drive unit for screw fixing onto left Free fitting, push button sender for recess installation in side panel (drill hole Ø 35 mm)
- > Nominal voltage: 24 V DC/2.5 A
- > Radio frequency: 2.4 GHz
- > Degree of protection: III
- > Supplied with:
  - 1 e-drive drive unit
  - 2 Push button senders (with CR2032 battery)
  - 1 Free flap e-drive front fixing bracket
  - 1 Drilling template for push button sender
  - 1 Set of operating instructions
- Fixing material
- > Zinc alloy drive housing, plastic push-button sender
- > Order qty: 1 set

25 YEARS

Fixings included




Only suitable for Free flap fittings that have been produced after 11.05.2015

Cat. No.

e-drive supplementary set, Free flap

372.91.099

## E-drive for Free fold, Free up and Free swing, supplementary set

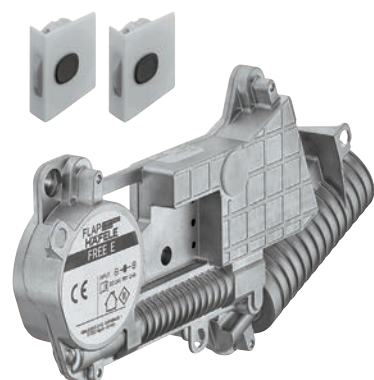

- > Installation: e-drive unit for screw fixing onto left Free fitting, push button sender for recess installation in side panel (drill hole Ø 35 mm)
- > Nominal voltage: 24 V DC/2.5 A
- > Radio frequency: 2.4 GHz
- > Degree of protection: III
- > Supplied with:
  - 1 e-drive drive unit
  - 2 Push button senders (with CR2032 battery)
  - 1 Drilling template for push button sender
  - 1 Set of operating instructions
- Fixing material
- > Zinc alloy drive housing, plastic push-button sender
- > Order qty: 1 set

25 YEARS

Fixings included



Free e-drive covers the same application areas as the mechanical basic fittings. The drilling patterns on side panel and front panel also remain unchanged

Cat. No.

e-drive supplementary set, Free fold/up/swing

372.37.099

## Driver, 24W, with Hafele Loox5 and Free E lead



ARTICLES REMOVED FROM PAGE  
372.91.100 Replaced by new number 372.91.110



Only one Free E drive unit can be connected to the driver




Order mains leads separately, shown below

- > For use with Free E driver unit, with overload protection
- > Input voltage: 100-240V for 40/90W drivers; 50-60Hz
- > Standby power consumption W: ≤ 0.3W, degree of protection: IP20
- > Approvals: Furniture items that are equipped with the Free E are subject to the EU machinery directives (2006/42/EG) within the European Economic Area (EEA), Switzerland and Turkey
- > Supplied with: 1x driver, 1x lead
- > Order qty: 1 pc

25 YEARS

Length x width x height	Output power	Output current A	Black
316 x 70 x 16 mm	90W	3.75A	372.91.110

## Mains leads

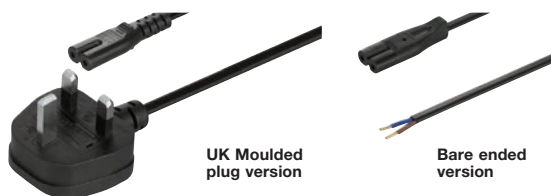

UK Moulded plug version

Bare ended version



Mains plug not included with bare ended version, must fitted by a qualified electrician

- > Voltage: 250V
- > Length: 2000 or 5000 mm
- > Black plastic
- > Order qty: 1 pc

7 YEARS

Type	Voltage	2000 mm	5000 mm
Moulded plug	250V	833.89.000	833.89.080
Bare ended	250V	833.89.009	-

PAGE AMENDED  
29.09.23/1

SALES DEPARTMENT 0800 171 2909

TECHNICAL SUPPORT 0800 171 2908