


LOOX5 24V LED 3038 DOWNLIGHT

The homogenous light output of the LED 3038 impresses in a wide range of furniture and cabinets. Be it recess mounting or mounting as a downlight, the 3W light always provides excellent colour rendering and illumination.



Loox5 24V LED 3038 downlight, Ø 65 mm

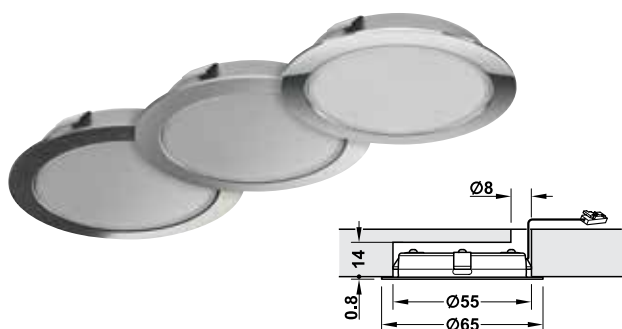

ARTICLES REMOVED FROM PAGE

833.70.290 Replaced by 833.75.350 833.70.361 Replaced by 833.75.342
 833.70.287 Replaced by 833.75.340 833.70.292 Replaced by 833.75.353
 833.70.284 Replaced by 833.75.360 833.70.289 Replaced by 833.75.342
 833.70.291 Replaced by 833.75.351 833.70.286 Replaced by 833.75.362
 833.70.288 Replaced by 833.75.341

Distance	120°	3000 K	4000 K	5000 K
250 mm		580 Lx	590 Lx	710 Lx
500 mm		220 Lx	220 Lx	265 Lx
750 mm		115 Lx	115 Lx	140 Lx
1000 mm		75 Lx	75 Lx	100 Lx



Order bezel separately for surface mounting, shown below

- > For recess mounting, press-fit in Ø 55 mm hole, order bezel separately
- > 0.8 mm rim, min. 14 mm hole depth required
- > For surface mounting, order bezel separately
- > Voltage: 24V. Wattage: 3.0W
- > Dimmable
- > Degree of protection: IP20
- > With 2.0 m lead with Loox5 24V connector
- > Steel housing
- > Order qty: 1 pc


Output:	3000 K	4000 K	5000 K
Light colour:	Warm white	Cool white	Cool white
Wattage (W):	3	3	3
Energy efficiency:			
Number of diodes	24	24	24
Light output (Lm):	215	225	245
Efficacy (Lm/W):	72	75	82
Colour Rendering Index:	90	90	90

5 24V



Finish	3000 K	4000 K	5000 K
Polished chrome-plated	833.75.350	833.75.351	833.75.352
Silver coloured	833.75.340	833.75.341	833.75.342
Stainless steel coloured	833.75.360	833.75.361	833.75.362

Loox5 LED 2020 / 2047 / 2048 / 3038 / 3039 bezel, Ø 66.5 mm

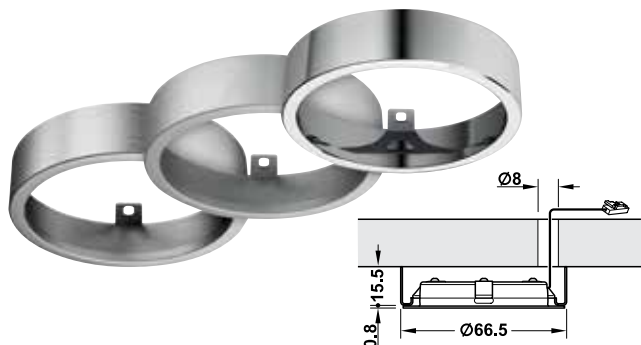

- > For surface mounting Loox LED 2020 / 2047 / 2048 / 3038 / 3039 downlights
- > Screw fixing
- > Zinc alloy
- > Order qty: 1 pc



Finish	Cat. No.
Polished chrome-plated	833.72.802
Silver coloured	833.72.803
Stainless steel coloured	833.72.804

YOU ALSO NEED:



DRIVER
Pg 5.76, 5.157



SWITCH
Page 5.160-166


OPTIONAL ACCESSORIES

Pages 5.158-159, 5.167-168, 5.178-181

PAGE AMENDED
12.12.23/3

LOOX5 24V LED 3039 DOWNLIGHT, MULTI-WHITE

The LED 3039 continuously changes the colour temperature from 2700K to 5000K, therefore creating different lighting atmospheres. The light is dimmable using Connect Mesh system with the multi-white adapter; order separately

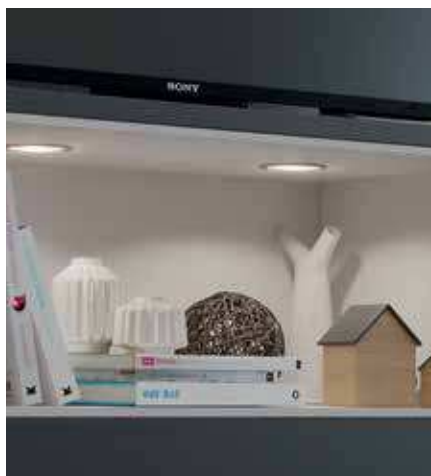

Loox5 24V LED 3039 downlight, Ø 65 mm, multi-white



- > For recess mounting, press-fit in Ø 55 mm hole
- > 0.8 mm rim, min. 14 mm hole depth required
- > For surface mounting, order bezel separately, for screw fixing
- > Voltage: 24V. Wattage: 3.0W
- > Colour temperature can be adjusted and dimmed with the Connect Mesh system and multi white adapter - order separately
- > Degree of protection: IP20
- > With 2.0 m multi-white lead with 24V Loox5 connector
- > Steel housing
- > Order qty: 1 pc

Output:	2700 K - 5000 K
Light colour:	Multi-white
Wattage (W):	3
Energy efficiency:	
Number of diodes	60
Light output (Lm):	258
Efficacy (Lm/W):	86
Colour Rendering Index:	2700 K = 90; 5000 K = 83

5 24V	Multi-White	0-100%	IP20			7 YEARS
Finish	2700K - 5000K					
Polished chrome plated	833.75.161					
Silver coloured	833.75.162					
Stainless steel coloured	833.75.163					

Distance	120°	2700 K	5000 K
250 mm		335 Lx	350 Lx
500 mm		125 Lx	130 Lx
750 mm		70 Lx	70 Lx
1000 mm		45 Lx	45 Lx




Order bezel separately for surface mounting, shown below



Control using Häfele Connect Mesh system, shown from page 5.178

Loox5 LED 2020 / 2047 / 2048 / 3038 / 3039 bezel, Ø 66.5 mm

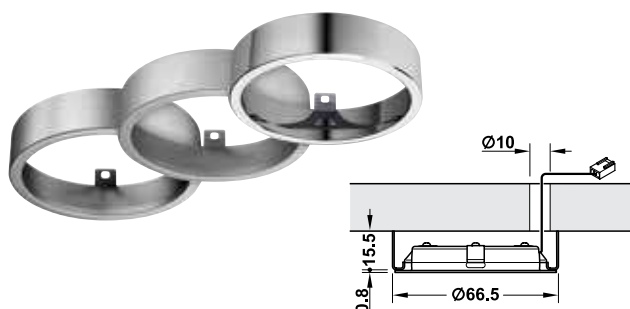

- > For surface mounting Loox LED 2020 / 2047 / 2048 / 3038 / 3039 downlights
- > Screw fixing
- > Zinc alloy
- > Order qty: 1 pc



Finish	Cat. No.
Polished chrome plated	833.72.802
Silver coloured	833.72.803
Stainless steel coloured	833.72.804

YOU ALSO NEED:



PAGE AMENDED
19.05.22/2