

## ABHW12/CCT


12W LED IP65 IK08 Coastal Wall And Ceiling CCT Selectable Bulkhead



### PRODUCT FEATURES

- IP65 Rating
- IK08 High Impact Durable Polycarbonate Housing
- CCT Selectable (3000K/4000K/6000K)
- Wall And Ceiling Mounting
- Loop In Loop Out Pre-Moulded Cable Entries
- Black And White Standard Trims Included
- Additional Decorative Trims Available\*
- Polycarbonate Body Ideal For Coastal Applications

Scan For Instructions

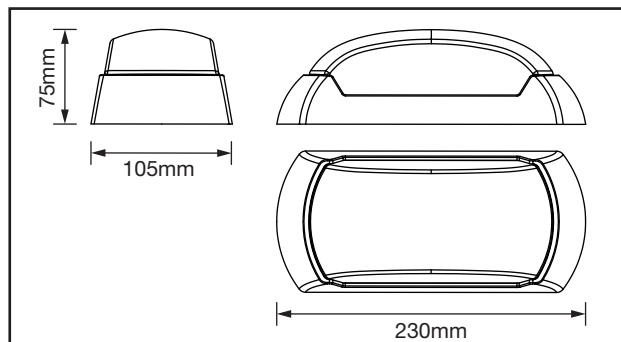

### TECHNICAL SPECIFICATIONS

| Product Code                       | ABHW12/CCT |               |       |
|------------------------------------|------------|---------------|-------|
| Luminous Flux (LM)                 | 810lm      | 1050lm        | 920lm |
| Useful Luminous Flux (LM)          | 810lm      | 1050lm        | 920lm |
| CCT (Kelvin)                       | 3000K      | 4000K         | 6000K |
| Peak Intensity                     | 153        | 196           | 171   |
| CRI                                |            | >80           |       |
| Beam Angle (°)                     |            | 160°          |       |
| Operating Voltage (AC)             |            | 220-240V AC   |       |
| Max Output Power                   |            | 12W           |       |
| Operating Current (A max)          |            | 0.07A         |       |
| Standby Power (W)                  |            | ≤0.5W         |       |
| Class                              |            | II            |       |
| Body Material                      |            | Polycarbonate |       |
| Frame Colour                       |            | White         |       |
| Switching Cycles                   |            | 50,000        |       |
| Ingress Protection                 |            | IP65          |       |
| Ambient Operating Temperature (°C) |            | -20°C ~ +45°C |       |
| Input Frequency (Hz)               |            | 50/60Hz       |       |
| Guarantee                          |            | 3 Years       |       |
| Lifetime (L70 B50)                 |            | 50,000 Hrs    |       |
| IK Rating                          |            | IK08          |       |
| Displacement Factor                |            | ≥0.7          |       |
| Flicker Metric (PstLM)             |            | <1            |       |
| Stroboscopic Effect Metric (SVM)   |            | <0.4          |       |



**Black Decorative Trim Pack\***  
ABHW12BZ/BK



**White Decorative Trim Pack\***  
ABHW12BZ/WH



\*Sold Separately