



ALSQ032

1W LED 350mA IP65 Low Level



PRODUCT FEATURES

- IP65 Rated
- Anti-Glare Low Level Lighting
- Frosted Glass For Optimum Light Distribution
- Ideal For Stair And Commercial Lighting
- Ultra Slim Profile
- Dimmable With Dimmable LED Driver
- 350mA Constant Current (Series Wiring)
- 1m Pre-Wired Cable

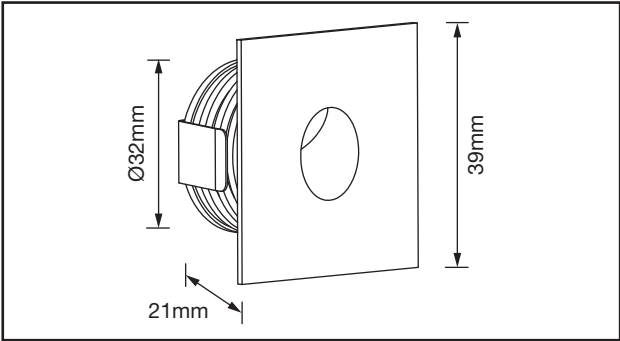

TECHNICAL SPECIFICATIONS

PRODUCT CODE	ALSQ032**/30	ALSQ032**/40
Rated Power	1W	1W
Lumens	≤80lm	≤90lm
Beam Angle	50°	50°
CCT	3000K	4000K
CRI	80	80
Lifetime	50,000 Hrs	50,000 Hrs
Operating Temperature	-20°C ~ +40°C	-20°C ~ +40°C
Operating Voltage	220-240V	220-240V
Power Factor	>0.5	>0.5
Frequency	50~60Hz	50~60Hz
Switching Cycles	<25,000	<25,000
Ingress Protection	IP65	IP65
Guarantee	3 Years	3 Years
SDCM	<6	<6
Class	III	III




Brushed Aluminium

ALSQ032AL



Polished Chrome

ALSQ032PC

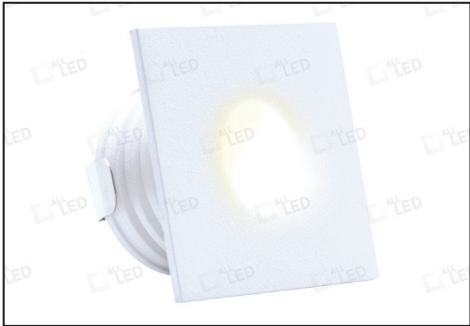

Polar White

ALSQ032WH

SERIES WIRING

350mA

WARM WHITE

3000K

COOL WHITE

4000K

DESIGNED IN BRITAIN

IP65

50,000H

SMD LED

CLASS 3

1M PREWIRED CABLE

≤90lm

50°

1W

DIMMABLE WITH DRIVER

3 YEAR GUARANTEE