


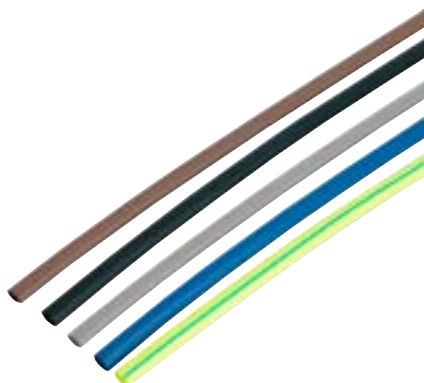

Dimensions

Length (mm)	225
Inner Diameter (mm)	6.4

General Information

Elongation Break (%)	250
Dielectric Strength (kV/mm)	20
Shrink Ratio (°C)	2:1
Shrink Temperature (°C)	<120
Longitudinal Change (%)	-10 to +1
Minimum Tensile Strength (MPa)	10
Flammability	ASTM D876 Passes UL224 VW1
Thermal Heat Ageing (°C)	168 Hours - 150, 4 Hours - 200
Chemical Resistance	23°C for 24 hours for petrol, H-515 hydraulic fluid, O-148 lubricating oil
Continuous Temperature (°C)	-55 to +125

Materials

Material: Halogen-Free Polyolefin

Additional Information

Pack contains 3 each of brown, blue, green/yellow, black and grey sleeving.

Standards

UL224 VW1 600V
Def Stan 59-9 Type 3
VG 95343 Part 5

