


# Data sheet


Part No.	<b>MIKA WH</b>
Description	mini trunking single compartment, with adhesive backing
Colour	white, similar to RAL 9010
Fire Behaviour	non flame propagating

Standard: EN 50085, BS 4678 Part 4

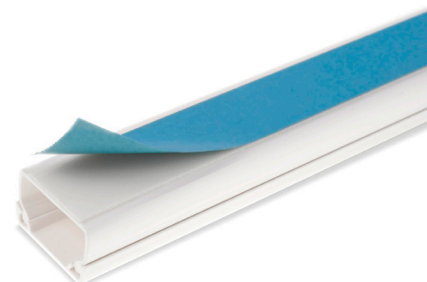

Length	Operating temperature	Material
3000 mm	-5 to +60 °C	PVC

Art. no.	Height x Width	ps	pl
106 609 MIKA 0WH (10/16) 3/20	10 x 16 mm	3 m	60 m
106 610 MIKA 1WH (16/16) 3/20	16 x 16 mm	3 m	60 m
106 611 MIKA 2WH (16/25) 3/20	16 x 25 mm	3 m	60 m
106 612 MIKA 3WH (16/40) 3/20	16 x 40 mm	3 m	60 m
106 613 MIKA 4WH (25/40) 3/10	25 x 40 mm	3 m	30 m
106 614 MIKA 5WH (40/40) 3/10	40 x 40 mm	3 m	30 m

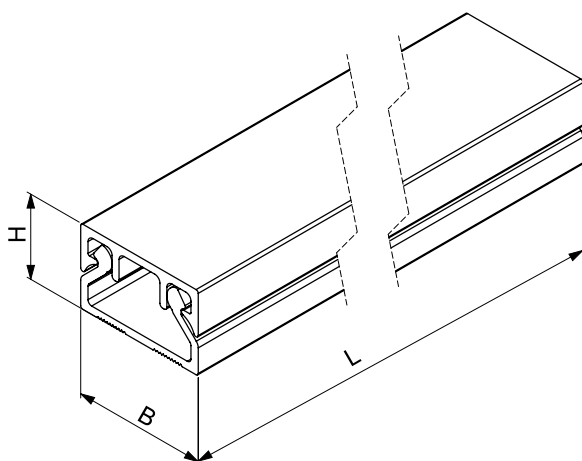

For sale in the UK market only.

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt, Dietzel GmbH, 1110 Wien, 1. Haidequerstraße 3-5, [www.dietzel-univolt.com](http://www.dietzel-univolt.com), makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice. Fully responsible for the content: UNIVOLT (UK) Ltd. Unit 4, Quadrant Park, Black Fan Road, Welwyn Garden City AL7 1FS.