DIMAX 540 plus B


Item no.: 5400130



Time and light control Dimmer

Description

- Flush-mounted dimmer for R and C loads
- Optimised settings for LEDs and incandescent lamps
- No neutral conductor necessary
- Small design, perfect for retrofitting
- Completely encapsulated electronics
- Temperature cut-off
- Overcurrent cut-off
- Short-circuit fuse
- Memory function saves the most recently set light level value and then dims to this value the next time it is switched on
- Function minimum brightness (10% in state of delivery, adjustable)

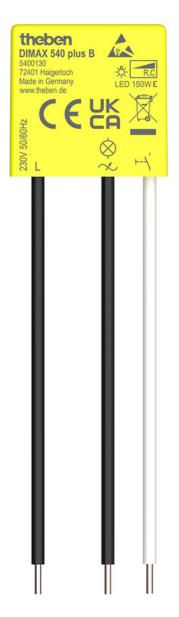

DIMAX 540 plus B Item no.: 5400130




Technical data


	DIMAX 540 plus B
Operating voltage	230 V AC
Frequency	50 - 60 Hz
Installation type	Flush-mounted
Stand-by consumption	~0.34 W
Incandescent/halogen lamp load	150 W
LED lamp < 2 W	150 W

	DIMAX 540 plus B
LED lamp > 8 W	150 W
LED lamp 2-8 W	150 W
Setting	Push-button
Max. cable length	100 m
Ambient temperature	-10°C 45°C

Connection example



Scale drawings

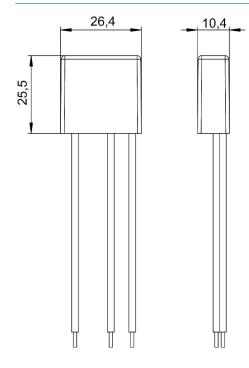

DIMAX 540 plus B Item no.: 5400130



Accessories

Compensation module LED Item no.: 9070825

