

niGLON™


Circuit Protection

A Type Switched Line & Neutral Bi-Directional RCBO

1P+N Mini Combined -
240V 30mA B Space Saver



Technical Drawing

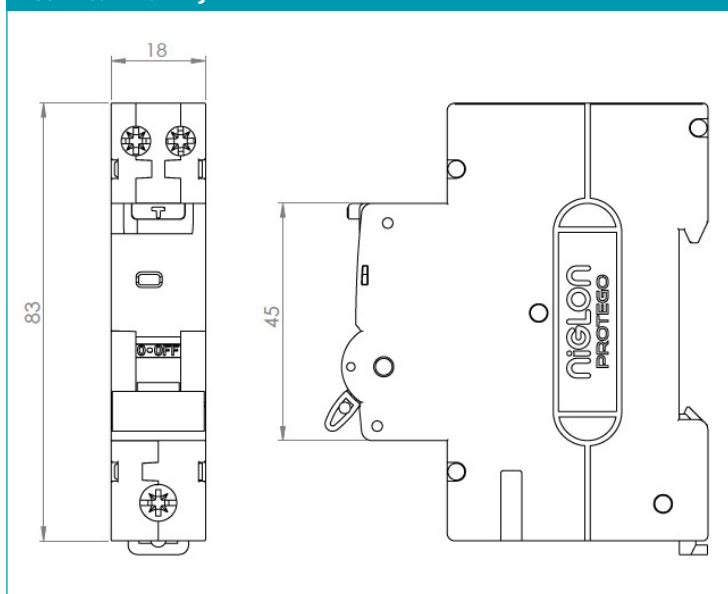

Technical Specifications

Rated Voltage	240V
RCD Type	A
Tripping Curve	B
Breaking Capacity	6kA
Rated trip current	30mA
Cable Capacity	L=25mm ² , L/N=10mm ²
Space Saver	Yes
Torque Rating	L=2.5Nm, L/N=1.2Nm
Bi-directional	Yes
Standards	BS EN 61009-1, IEC 61009-2-2
List No.	Rated Current
RCBO1-6/30SSAX2	6A
RCBO1-10/30SSAX2	10A
RCBO1-16/30SSAX2	16A
RCBO1-20/30SSAX2	20A
RCBO1-25/30SSAX2	25A
RCBO1-32/30SSAX2	32A
RCBO1-40/30SSAX2	40A