


Domestic Consumer Units (18 Edition)



Technical data GC6EV40PME

Rated current	40A
Rated voltage	230 V AC
Frequency	50/60 Hz
Rated Conditional Short Circuit (Icc)	Annex ZB: 16kA rms at 250V
Main Device	40A RCBO Type A
Additional Devices	PME Fault detection
Operation	207V - 253V (4 seconds)
Degree of protection	IP65
Total number of ways	6
Total Number of free ways	0
Height..mm (H)	231
Width..mm (W)	202
Depth..mm (D)	113
Ambient temperature (C)	-25.....+55
Storage temperature (C)	-35.....+55
Terminals	25mm
Material	ABS
Standard	EN 61439-3
	Compliance with BS 7671
Warranty (Mechanical Components)	5 Years
Warranty (Electronic Components)	2 Years

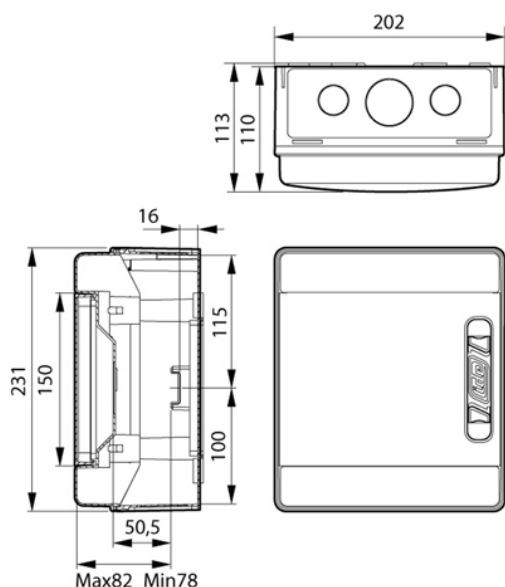




Technical Data

- Degree of Protection: IP65
- Resistance to Impact: IK08
- Auto-extinguishing degree: HB (UL94)
- Test of resistance to glow wire: 650° C
- Ball Pressure Test: 70° C
- Range of temperature under normal conditions: -25°C - +40°C
- Halogen free materials
ABS and polycarbonate

IET BS:7671:2018
722.411.4 TN system (Amendment 1:2020)
(iv) Protection against electric shock in a single-phase installation is provided by a device which electrically disconnects the vehicle from the live conductors of the supply and from protective earth in accordance with Regulation 543.3.3.101(ii) within 5 s in the event of the utilisation voltage at the charging point, between the line and neutral conductors, being greater than 253 V rms or less than 207 V rms. The device shall provide isolation and be selected in accordance with Table 537.4. Equivalent means of functionality could be included within the charging equipment. Closing or resetting of the device shall be possible only if the voltage between line and neutral conductors is in the range 207 to 253 V rms.

NOTE:
INCOMING (RCBO)
TERMINAL 2: PHASE
TERMINAL N: NEUTRAL
EARTH BAR: EARTH

OUTGOING (CONTACTOR)
TERMINAL 1: EARTH
TERMINAL 3: NEUTRAL
TERMINAL 5: PHASE

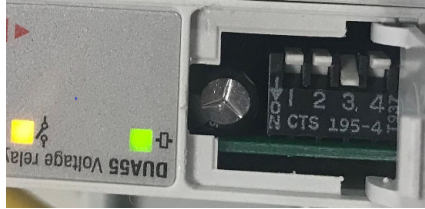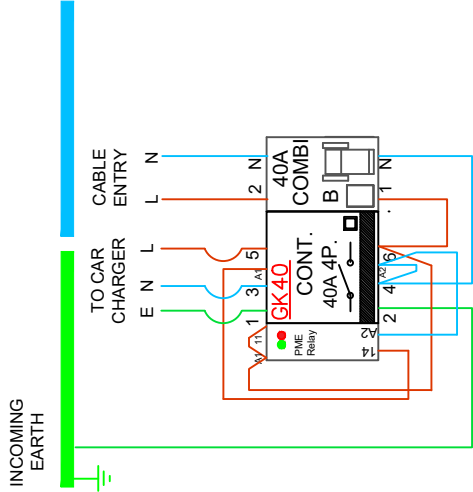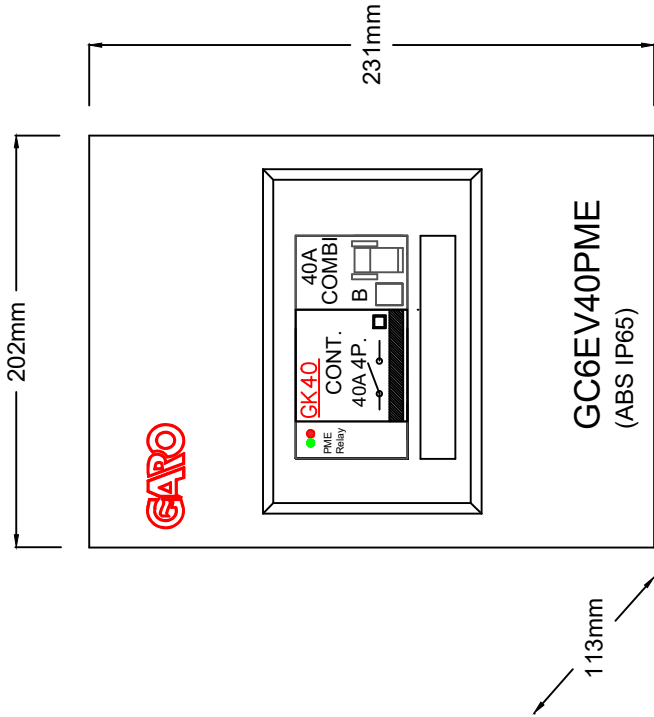

Relay setting
SW1 OFF
SW2 OFF
SW3 ON
SW4 OFF

NO	DESCRIPTION	DATE	NAME	CHECK	APPD

PROJECT
MCU 40Amp Type A RCBO & PME Fault Detection



Enterprise Trading Estate
Brierly Hill, West Midlands
DY5 1TX
UK

DRAWING No.	SHEET
GC6EV40PME	-3
PROJECT No	



Supplier/Tillverkare:

*GAROAB
Box 203
S-335 25 GNOSJO
Sweden*

Telephone: +46 (0)370 33 28 00

Telefax: +46 (0)370 33 28 50

Supplier established within EU/Ombud etablerad inom EG

Supplier of equipment /Materielslag : Consumer unit/Normcentral

Trade Mark/ Varumärke: GARO

Type Designation / Typbeteckning: G, GS, 4, 6, 8, 10, 12, 14,16,18, 21, 28, 32, EV, S, R, C, PME.

We hereby declare that our product fulfils the requirements of following EC directives/
Vi intygar härmed att vår produkt uppfyller krav enligt följande EU direktiv:

The following harmonised standards (latest edition) or technical specifications which comply with good engineering practice in safety matters in force within the EU have been used in the design:/
Följande harmoniserade standarder (senaste utgåva) eller tekniska specifikationer som uppfyller god säkerhetsteknik praxis inom EG har använts i konstruktionen: SS EN 6