




SAE2M-23-215

Type 2 (or 3) SPD

- Pre Mounted Enclosure

Technical Drawing

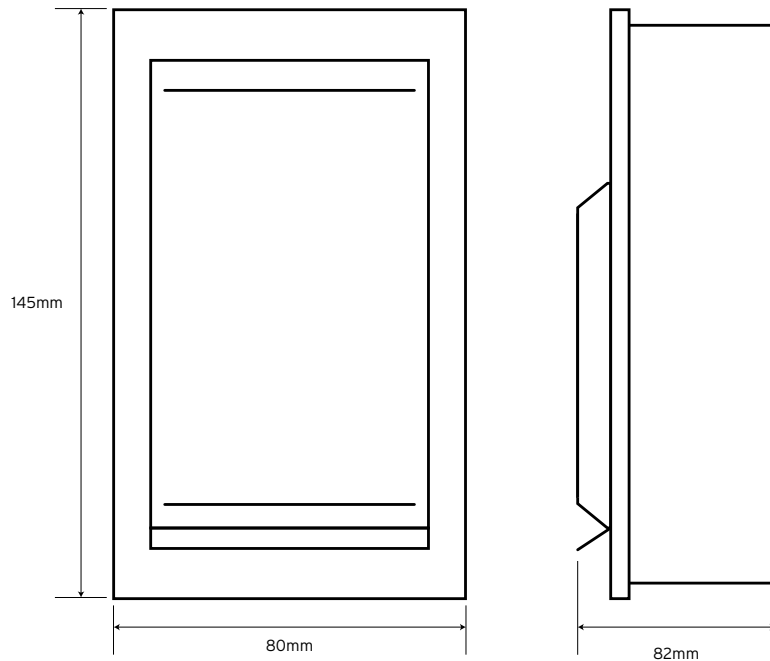

Enclosure Technical Specifications

| | |
|--------------------------------|---------------------------------|
| Material Composition | Manufactured from painted steel |
| Paint Colour | RAL 9010 |
| Max Modules | 2 |
| Degree of Protection | IP2X |
| Temp | -15° C to 60° C |
| Standard of Compliance | BS EN 60898 & 61008 |
| Dimensions (Mounted Enclosure) | 145 x 80 x 82mm (H x W x D) |

Circuit Breaker Technical Specifications

| | |
|----------------------------------|-------------------------|
| Miniature Circuit Breaker (MCBs) | Manufactured to EN60898 |
| Curve | B Type |
| Rating | 32 A |
| Breaking Capacity | 6kA |
| Standard of Compliance | BS EN 60898 |
| Certified | CE intertek |

SPD Technical Specifications

| | |
|-------------------------|---|
| SPD | 1 Module 1P+N 15kA Imax (SA23-215) |
| Max Discharge Current | Max withstand by pole at 8/20µs Imax 15kA |
| Earth Type | TN |
| Standards of Compliance | EN 61645-11, IEC 61643-11, UL1449ed.7 |
| Certified | CE ENEC |