


Domestic Consumer Units (18th Edition)

Consumer unit with SPD, I& Bi-directional RCBO 40A

GMS5EV40R

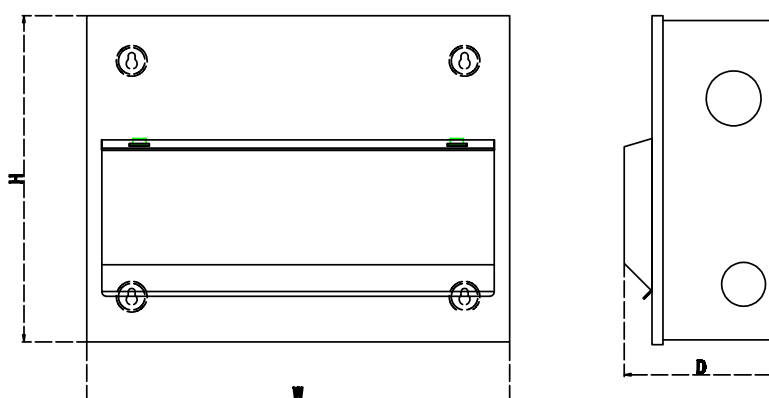

Technical data GMS5EV40R

Rated current	100A
Rated voltage	230 V AC
Frequency	50/60 Hz
Rated Conditional Short Circuit (Icc)	Annex ZB: 16kA rms at 250V
Main Device	100A DP Isolator
Additional Devices	40A RCBO 30mA
Surge Protection	SPD Type 2
Degree of protection	IP65
Total number of ways	5
Total Number of free ways	0
Height..mm (H)	240
Width..mm (W)	165
Depth..mm (D)	98
Ambient temperature (C)	-25.....+55
Storage temperature (C)	-35.....+55
Terminals	35mm
Maximum Backup Protection (A)	100
Standard	EN 61439-3
	Compliance with BS 7671



Supplier/Tillverkare: *GAROAB*
Box 203
S-335 25 GNOSJO Telephone: *+46 (0)370 33 28 00*
Sweden Telefax: *+46 (0)370 33 28 50*

Supplier established within EU/Ombud etablerad inom EG

Supplier of equipment /Materielslag : Consumer unit/Normcentral

Trade Mark/ Varumärke: GARO

Type Designation / Typbeteckning: G , GMS , 4, 6, 8, 10, 12, 14,16,18, 21, 28, 32, S, R, C, EV, SOL

We hereby declare that our product fulfils the requirements of following EC directives/ Vi intygar härmed att vår produkt uppfyller krav enligt följande EU direktiv:

The following harmonised standards (latest edition) or technical specifications which comply with good engineering practice in safety matters in force within the EU have been used in the design:/
Följande harmoniserade standarder (senaste utgåva) eller tekniska specifikationer som uppfyller god säkerhetsteknik praxis inom EG har använts i konstruktionen: SS EN 6