
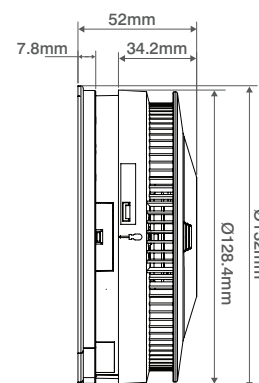


Product Code: ES1SRV

Description: Optical Smoke Alarm Powered by Mains with a Replaceable 9V Battery



General Information

| | |
|------------------------------------|---|
| Dimensions (mm) | Ø132 x 52 |
| Colour | White |
| Materials | UL94-V0 rated UV stabilised ABS |
| Mounting | Ceiling or Wall |
| Recommended Installation Locations | Living Areas, Bedrooms, Escape Routes & Stairways |
| Indication | 3 LEDs; Green - Power, Yellow - Fault, Red - Fire |
| Auto Dim Power LED | Day Mode and Night Mode (Not intrusive to sleep) |
| Manual Test Button | Checks sensor, electronics & sounder |
| Weight (Kg) | 0.25 |
| Warranty (Years) | 5 |

Technical

| | |
|---------------------|--|
| Sensor Type | Optical Smoke |
| Sounder Output (dB) | 85 @ 3m |
| Hush Function | Alarm hush - 10 minutes, Fault hush - 12 hours |
| Installation Grade | D2 |

Supply, Power & Backup

| | |
|-------------------------------|------------------------------|
| Supply Type | Mains AC with battery backup |
| Supply Voltage (V AC) | 230 |
| Frequency (Hz) | 50 |
| Maximum Power Consumption (W) | 1 |
| Standby Power Consumption (W) | 0.2 |
| Battery Backup | Replaceable Battery |
| Battery Type | 9V Alkaline |
| Battery Size | PP3 |
| Battery Chemistry | Alkaline |

Interconnectability

| | |
|--|-----|
| Wired Interconnect Supported | Yes |
| Maximum Interconnect Wiring Distance (m) | 300 |
| RF-LINK Supported | No |
| Maximum Supported Wired & RF-LINK Interconnected Devices | 28 |

Environment

| | |
|----------------------------------|---------------------|
| Operating Temperature (°C) | 0 to +40 |
| Relative Humidity Resistance (%) | 95 (non-condensing) |

Standards EN 14604: 2005 +AC: 2008

Accessories

ES1MP: Alarm Masking Plate
ES1MTW: Alarm Multi Tool (2 Pack) White
ES1MTB: Alarm Multi Tool (2 Pack) Black

Features

Dust compensation
Insect mesh
Lock-in wiring base
24 hour memory function
Clear LED indication status