

## SW100-STEEL/SW100-12MM-STEEL Sealing Ferrules & Wire

Our sealing ferrules & galvanised sealing wires are used in conjunction with pliers to **secure meters** & other small installations within **electricity, gas and utility** sectors, including requirements under the **MOCOPA framework**.

Ferrules are manufactured in **annealed copper** (tin-plated), and available in 6mm/12mm lengths. Sealing wire is produced from 0.93mm galvanised 7-strand steel, in pre-cut 15cm lengths as standard. Both items are usually packaged together as standard **in re-sealable bags of 100pcs** for ease of dispensing and use by field technicians.

Packs of 10, 25, 50 and 100 are available.




### Applications

For use as a security seal on electric, gas, water and fuel meters. Suitable for MOCOPA applications.

### Size Guide

6mm / 12mm sealing ferrules (see below)


15cm galvanised 7-line sealing wire, 0.93mm (see below)

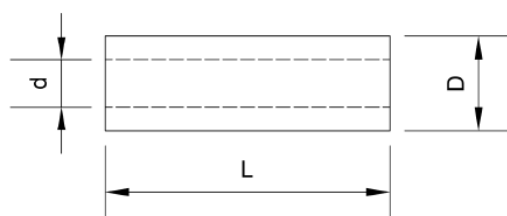

*Sealing Ferrule Dimensions*

D	Ø4mm
d	Ø2.1mm
L	6 / 12mm

tolerance  $\pm 3\%$

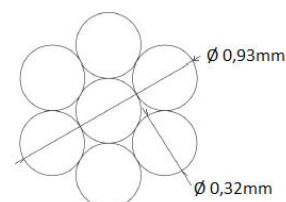

*Sealing Wire Dimensions*

### Material

Ferrules: Annealed copper, tin-plated /

Sealing Wire: Zinc-coated (galvanised) 7-strand steel wire (compliant to EN 10264-2)

### Customisation Options

6mm or 12mm size options

Our SEALING-PLIERS-PS Premium Ratchet Ferrule Sealing Pliers can be embossed with up to 3-characters per side (MOCOPA Accreditation required).

Standard Pliers (SEALING-PLIERS-S) and Ratchet Pliers (SEALING-PLIERS-RS) also available.