

# niglon


## Cable Management

# CPVC20B2 Contractor Pack

## Black



### KCPG20B Technical Drawing

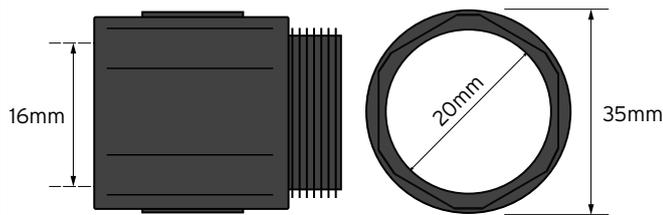

### Flexible Conduit Technical Drawing



### KCPG20B Technical Specifications

Trade Size	20
Outer Diameter	20mm
Inner Diameter	16mm
Thread Size	M20
Min & Max Temp. Range	-5 to 90°C
IP Rating	IP40
Lock nut included	M20
Material	Poly/PVC
Quantity	10

### Flexible Conduit Specifications

Material	Polypropylene
Impact Resistance	Light 1 Joule at 5°C
Trade Size	20
Coil Length	10m
Temp Range	-5 to 90°C
Isolation	IP40
Standards	EN50086.1 EN50086.22 Superseded by EN61386.1 and EN61386.22
Crush Resistance	320N
Colour	Black