



Product Code: ES1MODV

Description: Hardwired Interconnect Input Module

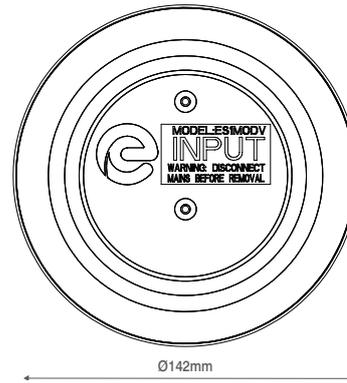

## General Information

Dimensions (mm)	Ø142 x 36.5
Colour	White
Materials	UL94-V0 rated UV stabilised ABS
Mounting	Ceiling or Wall
Weight (Kg)	0.168
Warranty (Years)	5

## Supply, Power & Backup

Supply Type	Mains AC with battery backup
Supply Voltage (V AC)	230
Frequency (Hz)	50
Cable Size (mm <sup>2</sup> )	0.75 - 2.5
Relay/Contact Type	Volt-free Normally Open Short to trigger
Maximum Power Consumption (W)	0.5
Standby Power Consumption (W)	0.2
Battery Backup	Non-replaceable Rechargeable
Battery Type	3V Lithium (x2)
Battery Size	VL2330
Battery Chemistry	Lithium

## Interconnectability

Wired Interconnect Supported	Yes
Maximum Interconnect Wiring Distance (m)	300
RF-LINK Supported	No
Maximum Supported Wired & RF-LINK Interconnected Devices	28

## Environment

Operating Temperature (°C)	0 to +40
Relative Humidity Resistance (%)	95 (non-condensing)

**Compatible Products** Interconnect supported Espire Products

## Features

Enables 3rd party devices to trigger the alarm function of Espire alarms