


## Liquid Resistant PVC Covered Steel Black Flexible Conduit



### Technical Drawing

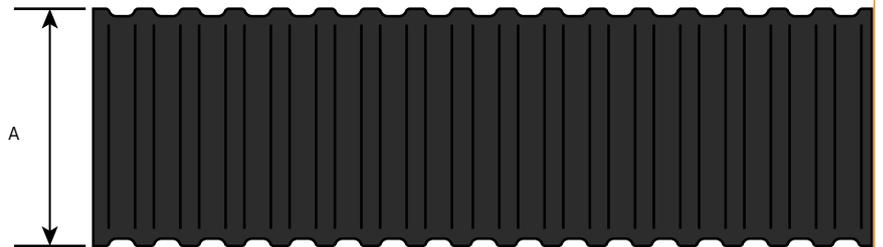

### Technical Specifications

<b>Material</b>	Galvanised Steel
<b>Cover</b>	Self-extinguishing PVC
<b>Temp Range (C)</b>	-15 to 70
<b>Ingress Protection</b>	IP40
<b>Compression Class 4</b>	1250N
<b>Impact Class 4</b>	6 Joules
<b>Standards</b>	BS EN 61386-1

### Dimensions

List No.	Trade Size mm (A)	Coil Length M
SPRP1250B	12	50
SPRP1610B	16	10
SPRP1650B	16	50
SPRP2010B	20	10
SPRP2050B	20	50
SPRP2510B	25	10
SPRP2550B	25	50
SPRP3210B	32	10
SPRP3230B	32	30
SPRP4010B	40	10
SPRP4030B	40	30
SPRP5010B	50	10
SPRP5030B	50	30