


Galvanised Steel Self Coloured Flexible Conduit

Square locked galvanised steel conduit, good mechanical stability and flexibility.

Applications in machine tool and connections for general wiring where light mechanical stress can be obtained.

Technical Drawing

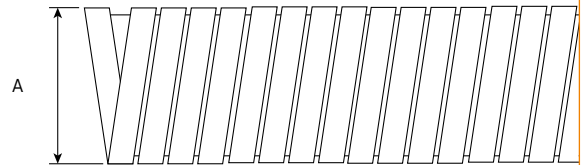

Technical Specifications

List No	SPRG1650	SPRG2010	SPRG2050	SPRG2510	SPRG2550
Material	Galvanised Steel	Galvanised Steel	Galvanised Steel	Galvanised Steel	Galvanised Steel
Size Nominal (A)	16mm	20mm	20mm	25mm	25mm
Coil Length	50m	10mm	50mm	10mm	50mm
Temp Range	-30°C to 300°C	-30°C to 300°C	-30°C to 300°C	-30°C to 300°C	-30°C to 300°C
Isolation	IP40	IP40	IP40	IP40	IP40
Standards	BS EN 61386-1:2008	BS EN 61386-1:2008	BS EN 61386-1:2008	BS EN 61386-1:2008	BS EN 61386-1:2008
Crush Resistance	1250N	1250N	1250N	1250N	1250N
Compatible Male Fixed Gland	MFG1616	MFG2020	MFG2020	MFG2525	MFG2525
Compatible Male Swivel Gland	MSG1616	MSG2020	MSG2020	MSG2525	MSG2525
Colour	Self Coloured	Self Coloured	Self Coloured	Self Coloured	Self Coloured