

112lm/W High efficacy of up to 112lm/W

 First fix bracket for quick & easy installation

 Ideal for coastal areas

WARRANTY

Warranty 5 years

FEATURES & BENEFITS

Colour switchable between 3 colour temperatures

IP65 rated, meaning it provides optimum protection against the impacts of rainwater and general adverse weather conditions

A unique 360° rotation for total flexibility, and a 180° tilt

Supplied with 1m cable

Wide 120° beam angle, reducing the number of fittings per area required

Performs in even more extreme conditions from -40°C to +40°C

IP65 PIR option provides override function to leave permanently on or off



FL05

50W colour switchable floodlight

FEATURES

| | |
|------------------------|----------------|
| IP rating | IP65 |
| IK rating | IK07 |
| CSP Switchable | Switchable CCT |
| Tilttable (°) | 180 |
| Sensor Option | PIR |
| Dimmable Option | No |
| LED Lifetime | L70 50,000h |
| Colour Rendering Index | CRI>80 |
| Colour Consistency | SDCM4 |
| Rotation angle (°) | 360 |

INSTALLATION INFORMATION

| | |
|-----------------------------|-----------------------------------|
| Input | 220-240V AC |
| Maximum Ambient Temperature | -40°C - 40°C |
| Weight | 1250g |
| Inrush Current | 28A 13µs |
| Construction Material | Anthracite painted cast aluminium |
| Electric Class (1, 2, 3) | I |
| Earth Leakage | 0.1 |
| Suitable for coastal areas | Yes |
| Install Connector Type | Flying lead |
| UK Building Regulations | N/A |
| Mounting Options | Wall |
| Power Factor | 0.9 |

Photometrics @ 25°C


| Product Code | Finish | Type | Beam | W | Colour | lm | lm/W | lx@1m | Energy |
|--------------|-------------------------|------------|------|-----|--------|------|------|-------|--------|
| FL05BXCS | Black | Standard | 120° | 50W | 3000K | 5000 | 100 | 2230 | |
| | | | | | 4000K | 5600 | 112 | 2449 | |
| | | | | | 6500K | 5100 | 102 | 2230 | |
| FL05BPCS | Black | PIR sensor | 120° | 50W | 3000K | 5000 | 100 | 2230 | |
| | | | | | 4000K | 5600 | 112 | 2449 | |
| | | | | | 6500K | 5100 | 102 | 2230 | |
| FL05WXCS | White RAL9016 | Standard | 120° | 50W | 3000K | 5000 | 100 | 2230 | |
| | | | | | 4000K | 5600 | 112 | 2449 | |
| | | | | | 6500K | 5100 | 102 | 2230 | |
| FL05WPCS | White RAL9016 | PIR sensor | 120° | 50W | 3000K | 5000 | 100 | 2230 | |
| | | | | | 4000K | 5600 | 112 | 2449 | |
| | | | | | 6500K | 5100 | 102 | 2230 | |
| FL05AXCS | Anthracite grey RAL7016 | Standard | 120° | 50W | 3000K | 5000 | 100 | 2230 | |
| | | | | | 4000K | 5600 | 112 | 2449 | |
| | | | | | 6500K | 5100 | 102 | 2230 | |
| FL05APCS | Anthracite grey RAL7016 | PIR sensor | 120° | 50W | 3000K | 5000 | 100 | 2230 | |
| | | | | | 4000K | 5600 | 112 | 2449 | |
| | | | | | 6500K | 5100 | 102 | 2230 | |

Energy rating is a reflection of the LED light source.

WIRING INFORMATION

| | |
|-------------------------|---|
| Cable / Flying Lead | 1m H05RN-F rubberised cable 3x1.0mm ² Ø7mm |
| Type of Wiring Required | Parallel |
| Input Cable Type | 3x 1.0mm ² |

ACCESSORIES

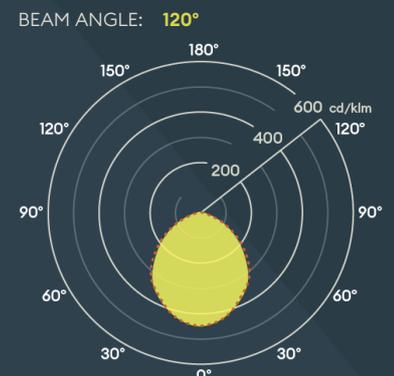

N/A (No Accessories required)



COLLINGWOOD
LIGHTING

LIGHTING INNOVATION

With a wide 120° beam angle and a unique 360° rotation, this 50W flicker-free floodlight is the ideal solution for outdoor use, lighting large areas, courtyards and entrances or for uplighting trees and buildings. With a market leading efficacy and contemporary black cast aluminium body, this colour switchable light is a versatile solution for your space. Choose the PIR sensor option for added security and reduction of energy bills in highly trafficked areas.