

1W

1W at 350mA



Coastal protected



Low voltage groundlight

WARRANTY

Warranty

7 years

FEATURES & BENEFITS

Angled light, ideal for use as a step light

Robust cable for outdoor use

Brushed stainless steel for sleek effect



GL022

Square 30° slotted LED ground / step light

FEATURES

IP rating	IP68
IK rating	IK07
CSP Switchable	Single CCT
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Walk Over / Drive Over	Walk over

INSTALLATION INFORMATION

Input	350mA DC
Maximum Ambient Temperature	35°C
Weight	270g
Inrush Current	N/A
Cut Out Size	50
Construction Material	Stainless steel (316)
UK Bathroom Zone	0
SELV	N/A
Electric Class (1, 2, 3)	III
Earth Leakage	N/A
Suitable for coastal areas	Yes

PHOTOMETRICS @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	Lx @ 1m	Energy
GL022 NW	Stainless steel	1W	4000K	30°	10	10	10	
GL022 WW	Stainless steel	1W	3000K	30°	8	8	8	
GL022 27	Stainless steel	1W	2700K	30°	8	8	7	

Energy rating is a reflection of the LED light source.

WIRING INFORMATION

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series
Input Cable Type	H05RN-F (6MM OD) 2 CORE


LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone	Min	Max
DRV350700TD (350 & 500mA)	220-240V	Yes	Yes	N/A		
PSIP3509W	220-240V	Yes	No	0	1	8
PSIP35018W	220-240V	Yes	No	1		

ACCESSORIES

JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
TUBE/50	Installation tube	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately

BEAM ANGLE: 30°

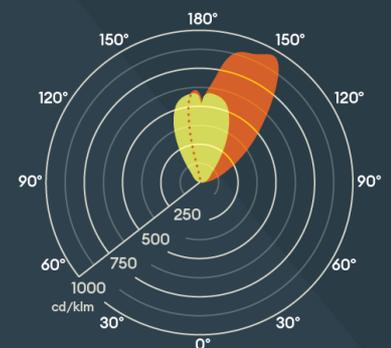

60x60mm

