

**2.6W** 2.6W

 Coastal protected

 Main voltage step light

## WARRANTY

Warranty 7 years

## FEATURES & BENEFITS

Recessed, asymmetric wall or ground light perfect for illuminating walls, steps and pathways

Available in rustic cast stainless steel and sleek brushed stainless steel finishes

Installation tube included



## WL339

Asymmetric, straight to mains, cast finish step light

### FEATURES

<b>IP rating</b>	IP65
<b>IK rating</b>	Other
<b>CSP Switchable</b>	Single CCT
<b>LED Lifetime</b>	L70 70,000h
<b>Colour Rendering Index</b>	CRI>80
<b>Colour Consistency</b>	SDCM3
<b>Walk Over / Drive Over</b>	Walk over

### INSTALLATION INFORMATION

<b>Input</b>	220-240V AC
<b>Maximum Ambient Temperature</b>	35°C
<b>Weight</b>	1000g
<b>Inrush Current</b>	9A 0.8ms
<b>Cut Out Size</b>	80
<b>Construction Material</b>	Stainless steel (316)
<b>UK Bathroom Zone</b>	2
<b>SELV</b>	Yes
<b>Electric Class (1, 2, 3)</b>	I
<b>Earth Leakage</b>	0.1
<b>Suitable for coastal areas</b>	Yes

### PHOTOMETRICS @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	Lx @ 1m	Energy
<b>WL339WW</b>	Stainless steel	2.6W	3000K	50°	50	19	54	

Energy rating is a reflection of the LED light source.

### WIRING INFORMATION

<b>Cable / Flying Lead</b>	1m (H05RN-F) rubberised cable (outside diameter: 7mm)
<b>Type of Wiring Required</b>	Parallel
<b>Input Cable Type</b>	(H05RN-F) rubberised (OD: 7mm)


### LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone
N/A (integrated SELV driver)	220-240V	Yes	No	2

### ACCESSORIES

<b>Installation Tube</b>	For easy ground installation	Included
<b>JB5</b>	Gel filled waterproof connector	Sold Separately
<b>WC 5-9</b>	Quick release waterproof joint	Sold Separately

BEAM ANGLE: **50°**

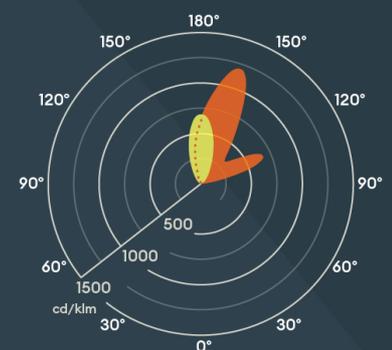

Ø98mm

