


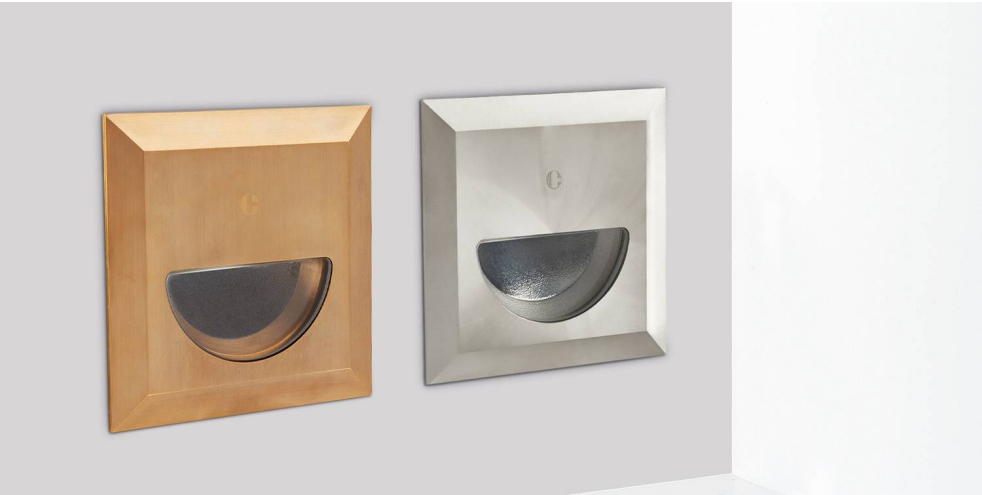

WL342

Asymmetric, straight to mains, brush finish step light

Features

IP rating	IP65
CSP Switchable	Single CCT
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Walk Over / Drive Over	Walk over

Installation Information

Input	220-240V AC
Maximum Ambient Temperature	35°C
Weight	1.2Kg
Inrush Current	9A 0.8ms
Cut Out Size	80
Construction Material	Stainless steel (316) antique brass
UK Bathroom Zone	2
SELV	Yes
Electric Class (1, 2, 3)	1
Earth Leakage	0.1mA
Suitable for coastal areas	Yes

Photometrics @ 25°C

Product Code	Finish	W	Colour	Beam	lm	lm/W	Lx @ 1m	Energy
WL342NW	Stainless steel	2.6W	4000K	50°	59	22	65	
WL342WW	Stainless steel	2.6W	3000K	50°	50	19	54	
WL34227	Stainless steel	2.6W	2700K	50°	49	19	52	
WL342AB27	Antique brass	2.6W	2700K	50°	49	19	52	
WL342AB30	Antique brass	2.6W	3000K	50°	50	19	54	

Energy rating is a reflection of the LED light source.

Wiring Information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel
Input Cable Type	(H05RN-F) rubberised (OD: 7mm)

LED Driver

Driver	Input	SELV	Dimming	Bathroom Zone
N/A (integrated SELV driver)	220-240V	Yes	No	2

Accessories

Installation Tube	For easy ground installation	Included
JB5	Gel filled waterproof connector	Sold Separately
WC 5-9	Quick release waterproof joint	Sold Separately



collingwood



2.6W



Coastal protected



Main voltage step light

Guarantee

Warranty 7 years

Features & benefits

- Can be used as a wall light or ground light
- Installation tube included
- 1m H05RN-F rubber cable attached for permanent use outdoors

Beam angle: 50°

