

LOOX 12V



From ambient through to functional lighting, the 12V system has everything you need to achieve the right lighting effect for the space you're designing.


LOOX 12V LED 2062 FLEXIBLE STRIP LIGHT, MONOCHROME, 8 MM

This 5 m LED 2062 strip light has 300 high quality Samsung LEDs per strip and is ideal for ambient lighting. Self adhesive fixing makes these lights easy to retrofit. Corner connectors are available for 90° installation. Can be shortened every 50 mm.



Aluminium profiles are available to order separately, shown from page **5.184**

Loox 12V LED 2062 flexible strip light, 8 mm width

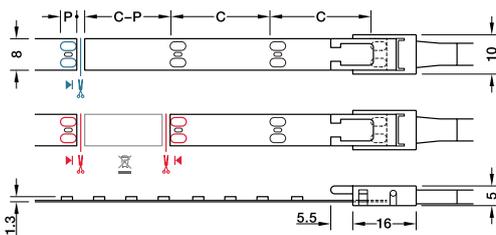

— Cut LED strip light to length (one contact side remains on the remainder piece; reusable)

— Connect LED strip lights (two contact sides required)

C = section length = 50 mm
P = length of contact surface = 4.0 mm

2700 K	3000 K	4000 K	5000 K	120°	
1050 lx	1090 lx	1120 lx	1130 lx		250 mm
435 lx	455 lx	460 lx	470 lx		500 mm
240 lx	245 lx	260 lx	260 lx		750 mm
145 lx	150 lx	155 lx	160 lx		1000 mm



- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.74**
- > Maximum recommended strip light length for optimum visual light output: 6.0 m

- > Equipped with high quality Samsung LEDs
- > For surface mounting, self adhesive, 5 m length
- > Can be shortened every 50 mm
- > Voltage: 12V. Wattage: 24W (4.8W per metre)
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: >50,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > With 2.0 m lead with Loox 12V connector
- > White plastic
- > Order qty: 1 pc (roll of 5 m length) or 1 set

Output:	2700 K	3000 K	4000 K	5000 K
Light colour:	Warm white		Cool white	
Wattage (W/m):	4.8W per metre			
Energy efficiency:				
Number of diodes	60 per metre			
Light output (Lm/m):	440	465	490	495
Efficacy (Lm/W):	92	97	102	103
CRI Ra / R9:	>90 / >50			

Length	2700 K	3000 K	4000 K	5000 K
5 m	833.70.244	833.70.245	833.70.246	833.70.247
Set includes flexible strip light, 1x 40W driver and mains lead				
Packed set	833.88.257	833.88.254	833.88.255	833.88.256

YOU ALSO NEED:



PAGE AMENDED
15.05.25/3