

Loox5 LED strip lights

Monochrome, 8 mm



Furniture Lighting: LED Lighting & Accessories

Häfele Loox5 LED 2162/2165/2168



LED 2162



LED 2165/2168

- > High luminous efficacy
- > Equipped with high-quality CREE LEDs

- > Dimmable: Yes
- > Material: Plastic
- > Finish/colour: White
- > Width: 8 mm
- > Height: 1.3 mm
- > Life time: L80/B10 >50,000 h, st. L70/B50 >80,000 h
- > Degree of protection: IP20
- > Mounting: Self-adhesive
- > Supplied with: 1 roll

Illuminance value in lx applies to 1 m strip length:

2700 K	3000 K	4000 K	5000 K	120°	
1050 lx	1090 lx	1120 lx	1130 lx		250 mm
435 lx	455 lx	460 lx	470 lx		500 mm
240 lx	245 lx	260 lx	260 lx		750 mm
145 lx	150 lx	155 lx	160 lx		1000 mm


LED 2162/2165

2700 K	3000 K	4000 K	5000 K	120°	
2145 lx	2250 lx	2300 lx	2300 lx		250 mm
900 lx	940 lx	950 lx	955 lx		500 mm
480 lx	505 lx	510 lx	515 lx		750 mm
300 lx	310 lx	320 lx	320 lx		1000 mm

LED 2168

Order reference:
Please order lead, driver and switch separately

Aluminium profile recommended from 9.6 W/m see page ► 1.32

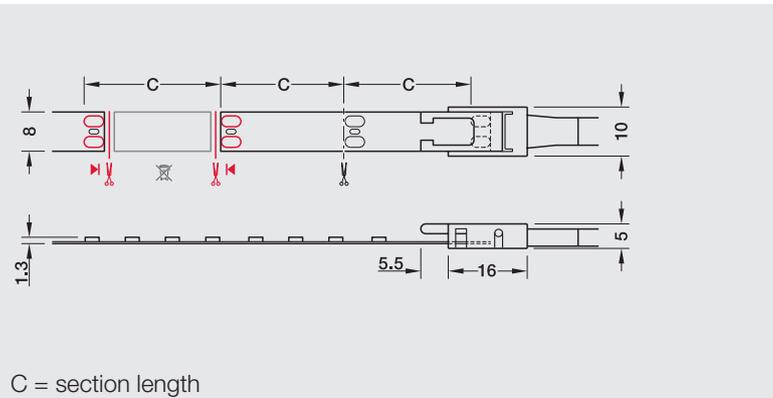

5 12V Loox5 12 V driver see page ► 1.120

5 24V Loox5 24 V driver see page ► 1.121

Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%
Please note: A strip section with a new power supply that follows immediately is noticeably brighter
Maximum wattage-dependent strip length on the driver, see pages ► 1.122-123

LIGHTING & ELECTRICAL 2024, © Häfele U.K. Ltd 2024. Dimensional data not binding. We reserve the right to alter specifications without notice.



Häfele Loox5 LED 2162/2165/2168

Voltage V	Number of LEDs LEDs/m	Colour temperature K	Wattage W/m	Luminous flux lm/m	Luminous efficacy lm/W	Colour rendering index		Energy efficiency class	Section length C mm	Max. strip length (visual) m	Available length		
						R _a	R ₉				5 m	50 m	
5 12V	Häfele Loox5 LED 2162												
	80	2700	3.0	440	147	92	>50	A	D	50	5.0	833.74.055	833.74.245
		3000	3.0	465	155	92	>50	A	D	50	5.0	833.74.056	833.74.246
		4000	3.0	490	163	92	>50	A	D	50	5.0	833.74.057	833.74.247
		5000	3.0	495	165	92	>50	A	D	50	5.0	833.74.058	833.74.248
	Häfele Loox5 LED 2165												
	120	2700	3.0	440	147	92	>50	A	D	25	6.0	833.74.155	833.74.255
		3000	3.0	465	155	92	>50	A	D	25	6.0	833.74.156	833.74.256
		4000	3.0	490	163	92	>50	A	D	25	6.0	833.74.157	833.74.257
		5000	3.0	495	165	92	>50	A	D	25	6.0	833.74.158	833.74.258
	Häfele Loox5 LED 2168												
	160	2700	6.0	920	153	92	>50	A	D	25	3.5	833.74.175	833.74.265
		3000	6.0	970	162	92	>50	A	D	25	3.5	833.74.176	833.74.267
		4000	6.0	1000	167	92	>50	A	D	25	3.5	833.74.177	833.74.268
		5000	6.0	1040	173	92	>50	A	C	25	3.5	833.74.178	833.74.269



> 5 A/18 AWG lead for LED strip light 8 mm

Voltage	Length mm	Cat. No.
5 12V	100	833.93.736
	500	833.95.701
	2000	833.95.700
5 24V	100	833.75.743
	500	833.95.707
	2000	833.95.706



> 5 A clip connector for 8 mm LED strip light

	Cat. No.
Clip connector	833.89.206



> Corner connector, 90° rigid, 5 A for left or right for 8 mm LED strip light

	Cat. No.
Corner connector rigid	833.89.187



> 5 A/18 AWG interconnecting lead for 8 mm LED strip light

Length mm	Cat. No.
50	833.89.191
500	833.89.192
2000	833.89.193



> Corner guidance, 90° rigid, for LED strip light up to 8 mm width

	Cat. No.
Corner guidance rigid	833.89.308

ARTICLES REMOVED FROM PAGE

833.74.336 DISCONTINUED - REPLACED BY **833.74.055**
 833.74.337 DISCONTINUED - REPLACED BY **833.74.056**
 833.74.338 DISCONTINUED - REPLACED BY **833.74.057**
 833.74.339 DISCONTINUED - REPLACED BY **833.74.058**
 833.74.340 DISCONTINUED - REPLACED BY **833.74.245**
 833.74.341 DISCONTINUED - REPLACED BY **833.74.246**
 833.74.342 DISCONTINUED - REPLACED BY **833.74.247**
 833.74.343 DISCONTINUED - REPLACED BY **833.74.248**
 833.74.354 DISCONTINUED - REPLACED BY **833.74.155**
 833.74.355 DISCONTINUED - REPLACED BY **833.74.156**
 833.74.356 DISCONTINUED - REPLACED BY **833.74.157**
 833.74.357 DISCONTINUED - REPLACED BY **833.74.158**

ARTICLES REMOVED FROM PAGE

833.74.358 DISCONTINUED - REPLACED BY **833.74.255**
 833.74.359 DISCONTINUED - REPLACED BY **833.74.256**
 833.74.360 DISCONTINUED - REPLACED BY **833.74.257**
 833.74.361 DISCONTINUED - REPLACED BY **833.74.258**
 833.74.362 DISCONTINUED - REPLACED BY **833.74.175**
 833.74.363 DISCONTINUED - REPLACED BY **833.74.176**
 833.74.364 DISCONTINUED - REPLACED BY **833.74.177**
 833.74.365 DISCONTINUED - REPLACED BY **833.74.178**
 833.74.366 DISCONTINUED - REPLACED BY **833.74.265**
 833.74.367 DISCONTINUED - REPLACED BY **833.74.266**
 833.74.368 DISCONTINUED - REPLACED BY **833.74.267**
 833.74.369 DISCONTINUED - REPLACED BY **833.74.268**