




## LED2112    LED3113 LED3112    LED3114


833.74.485-488    833.75.485-490  
833.75.435-440    833.75.445-450  
833.75.495-500

	K	W	②	T <sub>A</sub>	 mm/in
833.75.435 833.75.445 833.75.485 833.75.495	2700 K	3.0 W	 Tunable white 2-wire technology	-20°C – +45°C -4°F – +113°F	Ø 61 x 13 / Ø 2.4 x 0.47
833.74.485 833.74.486 833.74.487 833.74.488					
833.75.436 833.75.446 833.75.486 833.75.496	4000 K	3.0 W			
833.75.437 833.75.447 833.75.487 833.75.497					
833.75.438 833.75.448 833.75.488 833.75.498	2700 – 5000 K	3.0 W			
833.75.439 833.75.449 833.75.489 833.75.499					
833.75.440 833.75.450 833.75.490 833.75.500	2700 – 5000 K	3.0 W			




732\_28.536

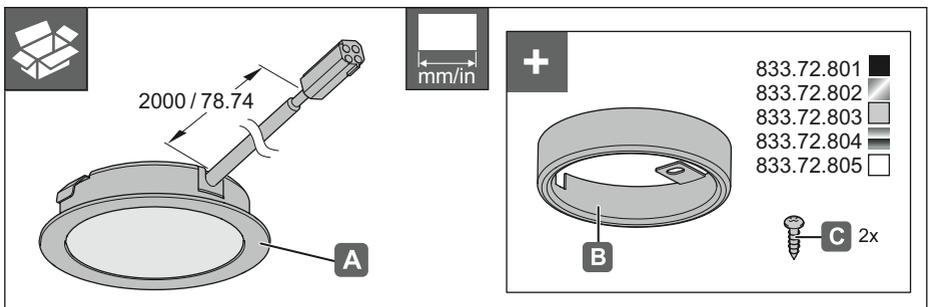

[WS269]

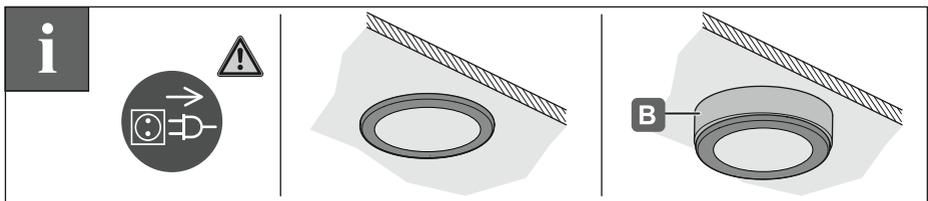

HDE 02.04.2025

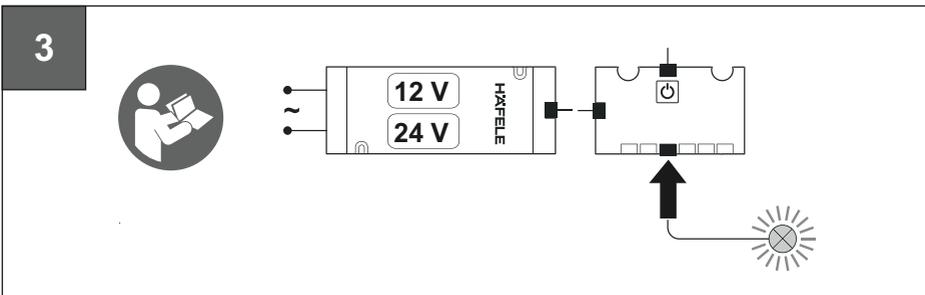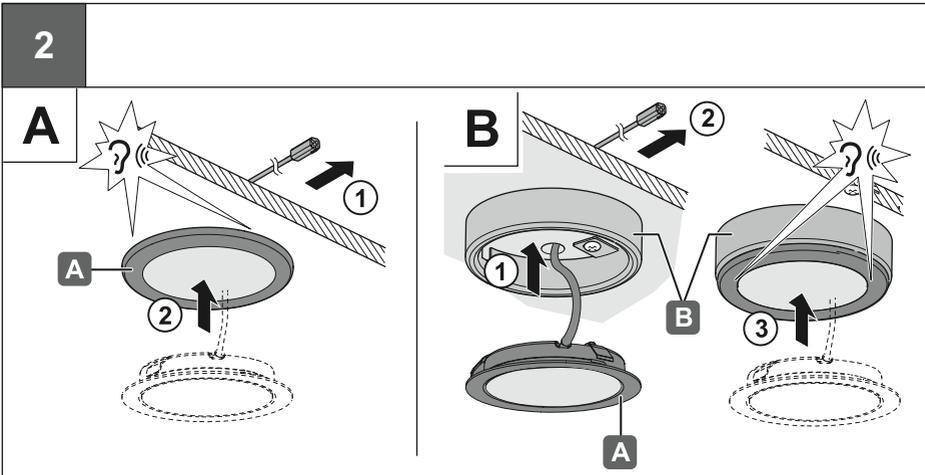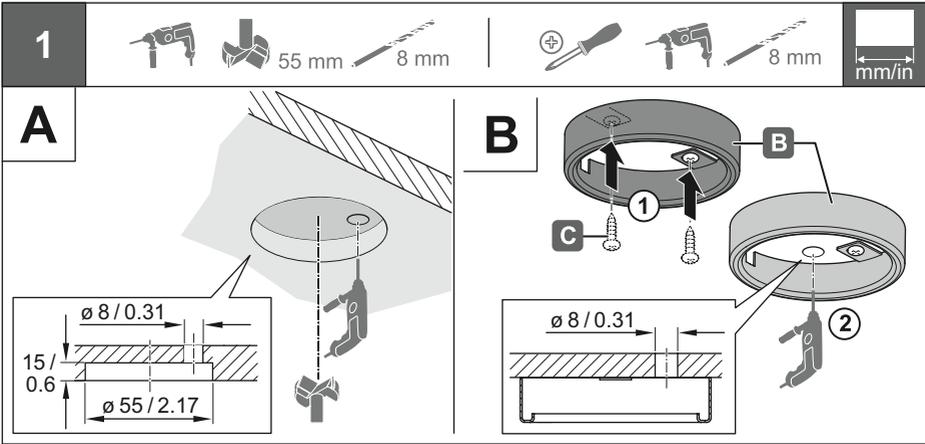

732.28.536

[WS269]

HDE 02.04.2025