

# Data sheet

|                |   |
|----------------|---|
| Part No.       | <b>BSSH</b>   |
| Description    | rigid conduit, plain ends<br>medium compression resistance,<br>medium impact resistance |
| Colour         | black, similar to RAL 9005<br>white, similar to RAL 9010                                |
| Fire Behaviour | non flame propagating   |
| Classification | 33211   |

**PVC-LSF** 




Standard: EN 61386-21



| Compression resistance | Impact resistance | Operating temperature | Bending strength | Material |
|------------------------|-------------------|-----------------------|------------------|----------|
| > 750 N                | > 2 J             | -5 to +60°C           | Rigid            | PVC-LSF  |

| Art. no.           | ED   | ID     | PU  | PU   |
|--------------------|------|--------|-----|------|
| 103 718 BSSH 20 WH | 20mm | 16,4mm | 3 m | 90 m |
| 103 719 BSSH 25 WH | 25mm | 21,4mm | 3 m | 90 m |
| 105 790 BSSH 20 BK | 20mm | 16,4mm | 3 m | 90 m |
| 105 791 BSSH 25 BK | 25mm | 21,4mm | 3 m | 90 m |

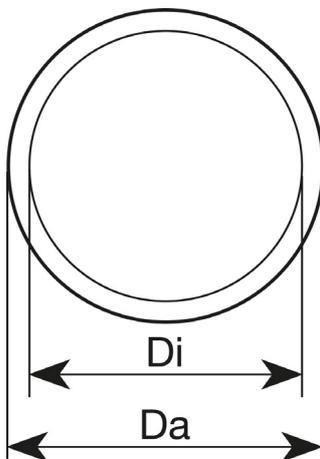

For sale in the UK market only.