


ANS0306SB

5W/m 3x6mm 24V IP67 Side Bend
Mini Neon LED Strip Light



PRODUCT FEATURES

- Continuous And Even Dotless Light Effect
- High CRI 90 - Delivers More Vibrant And True-To-Life Colours.
- Available Colour Temperatures: 2200k (Extra Warm White), 3000K (Warm White) And 4000K (Cool White).
- Ingress Protection: IP67 - Suitable For Both Indoor And Outdoor Applications.
- Dimmable* - Compatible With A Dimmable Driver (Sold Separately).
- Maximum Lengths: 5 Metres (Powered From A Single End) Or 10 Metres (Powered From Both Ends)
- Cutting Intervals: Every 25mm For Precise Length Adjustment.
- Customisation: Bespoke Lengths And Configurations Available Upon Request.
- At Just 3mm, It's A Breakthrough In Optical Design. Where Ultra-Thin Meets Ultra-Powerful. Pure Innovation, Distilled To A Razor Edge.

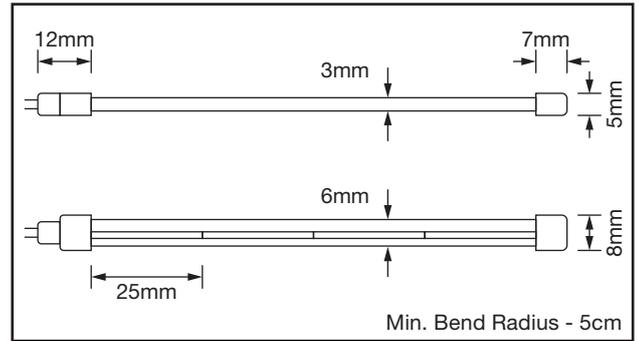

TECHNICAL SPECIFICATIONS

Product Code	ANS0306SB/22	ANS0306SB/30	ANS0306SB/40
Useful Luminous Flux (LM)	95lm/m	120lm/m	120lm/m
CCT (Kelvin)	2200K	3000K	4000K
Beam Angle (°)	120°	120°	120°
SDCM	<6	<6	<6
CRI	>90	>90	>90
Peak Intensity (cd)	32cd	39cd	39cd
Operating Voltage (V)	24V DC	24V DC	24V DC
Operating Output Power (W)	5W/m	5W/m	5W/m
Class	III	III	III
Body Material	Silicone	Silicone	Silicone
Cut Points	25mm	25mm	25mm
LED/m	240 LEDs/m	240 LEDs/m	240 LEDs/m
Reel Length	50m	50m	50m
Frame Colour	Polar White	Polar White	Polar White
Switching Cycles	>15,000	>15,000	>15,000
Ingress Protection	IP67	IP67	IP67
Ambient Operating Temperature (°C)	-20°C ~ +40°C	-20°C ~ +40°C	-20°C ~ +40°C
Guarantee†	3 Years	3 Years	3 Years
Dimmable	With Dimmable Driver	With Dimmable Driver	With Dimmable Driver
Lifetime (L70 B50)	30,000 Hours	30,000 Hours	30,000 Hours

ACCESSORIES*



End Caps
ANS0306/EC/IP67



Live Ends
ANS0306/LE/IP67



Mounting Profile
ANS0306/ALP
(x2 1 Metre)

*Sold Separately. †Marine use will make guarantee 2 years.
Do not use alcohol, chlorine, sulphur based chemicals on product.

