



## ANS1414/RGBWW/TB

15W/m 14x14mm RGBWW 24V IP67  
Top Bend Neon LED Strip Light



### PRODUCT FEATURES

- Continuous And Even Dotless Light Effect.
- High CRI 90 - Delivers More Vibrant And True-To-Life Colours.
- Ingress Protection: IP67 - Suitable For Both Indoor And Outdoor Applications.
- Dimmable\* - Compatible With A Dimmable Driver (Sold Separately).
- Maximum Lengths: 5 Metres (Powered From A Single End) Or 10 Metres (Powered From Both Ends)
- Cutting Intervals: Every 50mm For Precise Length Adjustment.
- Customisation: Bespoke Lengths And Configurations Available Upon Request.

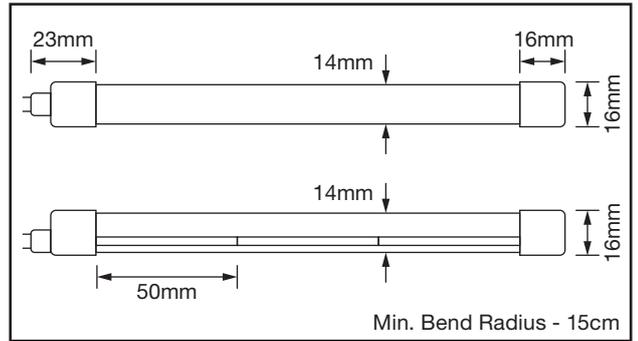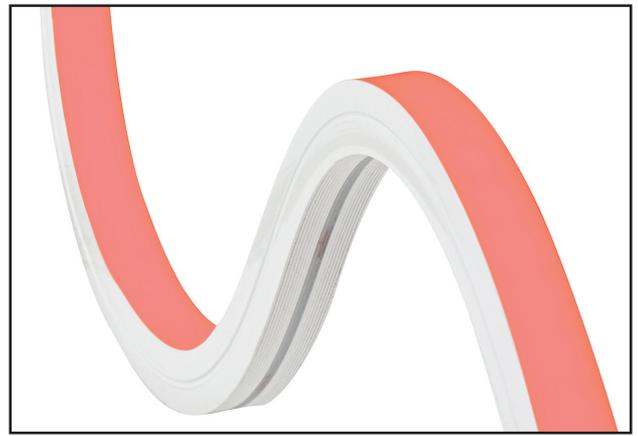

### TECHNICAL SPECIFICATIONS

Product Code	ANS1414/RGBWW/TB			
Useful Luminous Flux (LM)	90lm/M	419lm/M	71lm/M	300lm/M
CCT (Kelvin)	RED	GREEN	BLUE	3000K
Beam Angle (°)	120°	120°	120°	120°
SDCM	<6	<6	<6	<6
CRI	>90	>90	>90	>90
Peak Intensity (cd)	28cd	110cd	19cd	78cd
Operating Voltage (V)	24V DC	24V DC	24V DC	24V DC
Operating Output Power (W)	15W/m	15W/m	15W/m	15W/m
Class	III	III	III	III
Body Material	Silicone	Silicone	Silicone	Silicone
Cut Points	50mm	50mm	50mm	50mm
LED/m	560 LEDs/m	560 LEDs/m	560 LEDs/m	560 LEDs/m
Reel Length	30m	30m	30m	30m
Frame Colour	Polar White	Polar White	Polar White	Polar White
Switching Cycles	>15,000	>15,000	>15,000	>15,000
Ingress Protection	IP67	IP67	IP67	IP67
Ambient Operating Temperature (°C)	-20°C ~ +40°C	-20°C ~ +40°C	-20°C ~ +40°C	-20°C ~ +40°C
Guarantee†	3 Years	3 Years	3 Years	3 Years
Lifetime (L70 B50)	30,000 Hours	30,000 Hours	30,000 Hours	30,000 Hours

### ACCESSORIES\*



**End Caps**  
ANS1414/EC/IP67



**Live Ends**  
ANS1414/LE/IP67



**Mounting Clips**  
ANS1414/MC

\*Sold Separately. †Marine use will make guarantee 2 years.  
Do not use alcohol, chlorine, sulphur based chemicals on product.

