



## Suretime Outdoor PIR

### Range

STLB1000	Suretime Outdoor PIR Black
STLW1000	Suretime Outdoor PIR White


### Features

- Manual override (Pulse) for extended light on times.
- Adjustable time ON setting.
- Adjustable lux level.
- Knockouts to allow cable entry from underneath the PIR.

### Dimensions

	Height (mm)	Width (mm)	Depth (mm)	Weight (g)
STLB1000	76	76	87	119
STLW1000	76	76	87	119

### Line Diagram(s)

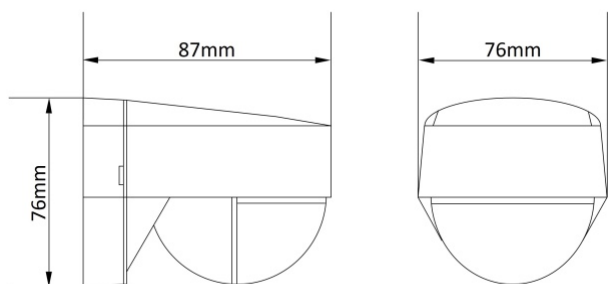

### Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface
Earth Class Rating	Class II
Operating Temperature	-20°C to 40°C
Ingress Protection Rating	IP55
Setting Type	Dial
Approved Mounting Height (m)	2.5
Motion Detection (m)	8 to 12
Detection Angle	180°
Mounting Hole Centres (mm)	58
Standby Consumption	<1W
Number Of Channels	1
Switch Rating	200W LED, 1000W Halogen, 200W Fluorescent/Low Energy Lighting
ON Time Adjustment	3 Seconds to 18 Minutes. User Adjustable
LUX Level	10 to 1000
Detection Range (m)	8 to 12
Permanent ON Facility	Yes (Pulse Override)
Dusk Till Dawn	No
Multiple Unit Support	Up to 5 Units In Parallel
Cable Entry(s)	Back Entry, Bottom Entry
Body Construction	Polycarbonate
Product Colour	Black
Accessories (Included)	Fittings (Raw Plugs, Screws)