

**WARMTONE GLASS GU10 400LM 3.6W 1800-2700K DIMMABLE 36 BEAM
INTEGRAL**

ILGU10DC121



The dimmer the light, the warmer the colour - Integral WarmTone LED Spotlights are the ideal spotlight for bringing a cosy atmosphere to your home or hospitality environments. By using advanced LED dimming technology, the WarmTone GU10 Spotlight closely resembles the dimming performance of halogen or incandescent lamps, which naturally get warmer in tone as they dim to lower levels of luminosity. This WarmTone GU10 also features a full glass body, further mirroring the familiar look of a halogen spotlight. The WarmTone GU10 Spotlight combines the aesthetic benefits of traditional lighting technologies with the energy efficiency and long lifetime of LED.

Details

Barcode:	5055788259770
Quick Order Code:	415372
Category:	Lamps
Range Name:	WarmTone
Market Segment:	Commercial indoor, Residential indoor
Finish:	Clear
Features:	Dim-to-Warm
Warranty (Years):	2

Physical Data

Product Length (mm):	50
Product Width (mm):	50
Product Weight (g):	45
Optic:	Designed to give a Classic Glass Look
Material:	Glass, Injection moulded diffuser
Base Term:	GU10
Bulb Base:	GU10
Construction:	Glass and "Classic look" difuser lens
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting
Spot Type:	SMD

Electrical Data

Power (W):	3.6
-------------------	-----


Power Consumption (W) :	3.6
Power Factor:	0.4
Voltage Range (v):	220-240
Wattage equivalent (W):	50
Amperage (mA):	23
Dimming:	Mains dim
Driver Included:	Yes
Electric Current:	AC
True Wattage Eq (W):	50
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	400
Luminous efficacy (lm/W):	96
Correlated Colour Temperature (CCT) (K):	1800 to 2700 (CCT Tuneable)
Colour Temperature:	1800 to 2700 (CCT Tuneable)
Colour Temperature Name:	Ultra Warm to Warm
Beam Angle:	36
Colour Rendering Index (CRI):	80
Colour Type:	White
Compatible Dimmers:	Varilight JQP401W
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	15000
Switching Cycles:	50000
Useful Lumens (lm):	345

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
New Energy Rating:	E
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

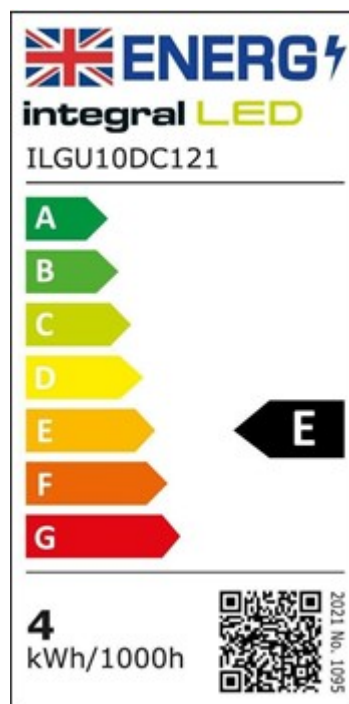

Packaging

Barcode:	5055788259770
Single box qty:	1
Package Weight (g):	59
Package Length (mm):	55
Package Width (mm):	55
Package Depth (mm):	60
Inner Carton Barcode:	05055788259909
Qty per Inner Carton :	10
Inner Carton Length (mm):	290
Inner Carton Width (mm):	120
Inner Carton Depth (mm):	70
Outer Carton Barcode:	05055788260035
Qty per Outer Carton:	100
Outer Carton Length (mm):	626
Outer Carton Width (mm):	310
Outer Carton Depth (mm):	170