sales@wced.co.uk
0161 723 1451





4 Pole 10kA MCB Data Sheet


Description and Features


The Whitecliffe MCBs can be the ideal solution for domestic, as well as in commercial and industry electrical, distribution systems because of its long lasting and durable nature.

Part Code	Description	Box Qty
WKC406B	4 Pole 6Amps B Curve 10kA MCB	30
WKC410B	4 Pole 10Amps B Curve 10kA MCB	30
WKC416B	4 Pole 16Amps B Curve 10kA MCB	30
WKC420B	4 Pole 20Amps B Curve 10kA MCB	30
WKC425B	4 Pole 25Amps B Curve 10kA MCB	30
WKC432B	4 Pole 32Amps B Curve 10kA MCB	30
WKC440B	4 Pole 40Amps B Curve 10kA MCB	30
WKC450B	4 Pole 50Amps B Curve 10kA MCB	30
WKC463B	4 Pole 63Amps B Curve 10kA MCB	30
WKC406C	4 Pole 6Amps C Curve 10kA MCB	30
WKC410C	4 Pole 10Amps C Curve 10kA MCB	30
WKC416C	4 Pole 16Amps C Curve 10kA MCB	30
WKC420C	4 Pole 20Amps C Curve 10kA MCB	30
WKC425C	4 Pole 25Amps C Curve 10kA MCB	30
WKC432C	4 Pole 32Amps C Curve 10kA MCB	30
WKC440C	4 Pole 40Amps C Curve 10kA MCB	30
WKC450C	4 Pole 50Amps C Curve 10kA MCB	30
WKC463C	4 Pole 63Amps C Curve 10kA MCB	30

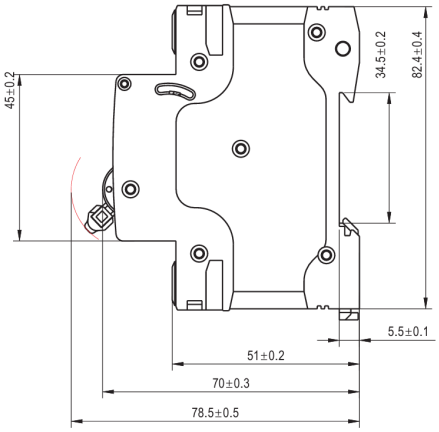

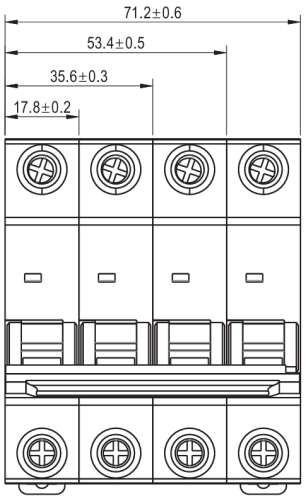

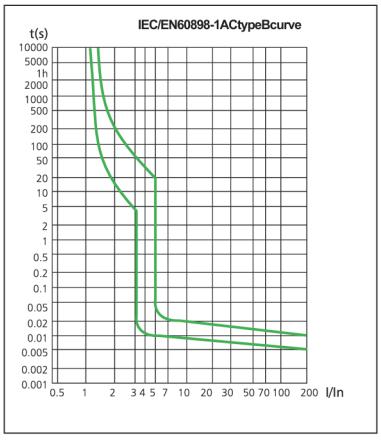

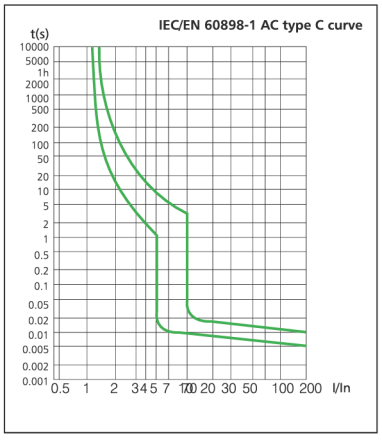

Unit 7 connect 56 Business hub, Bury, Manchester, BL9 9NY

sales@wced.co.uk
0161 723 1451

Electrical Features	Rated current In	6A,10A,16A,20A,25A,32A,40A,50A,63A
	Rated voltage Ue	230/400V
	Insulation voltage Ui	500V
	Rated frequency	50/60Hz AC
	Rated breaking capacity	10,000A
	Energy limiting class	3
	Rated impulse with stand voltage (1.2/50) Uimp	4000V
	Dielectric test voltageat ind. Freq. for 1 min	2kV
	Pollution degree	2
	Thermo-magnetic release characteristic	B,C,D
Mechanical features	Electrical features	4000 cycles
	Mechanical life	20,000 cycles
	Contact position indicator	Yes
	Protection degree	IP20
	Reference temperature for setting of thermal element	30℃
	Ambient temperature(with daily average=35℃)	-5℃~+40℃
	Storage temperation	-25℃~+70℃
Installation	Terminal connection type	Cable/U-type busbar/Pin-type busbar
	Terminal size top/bottom for cable	25mm² 18-4AWG
	Terminal size top/bottom for busbar	10mm² 18-8AWG
	Tightening torque	2.5Nm
	Mounting	On DIN rail EN 60715 (35mm)by means of fast clip device
	Connection	From top and bottom