

Loox5 LED strip lights

Monochrome Flex




Furniture Lighting: LED Lighting & Accessories

Häfele Loox5 LED 3084 Flex strip light



Effortlessly create lighting designs that flex and bend around tight angles and corners without losing any light

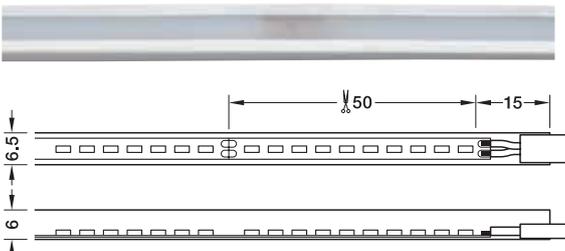

Cut marks visible on the back by squeezing the silicone tube



- > Sliding into fillgree groove (6.5 x 6 mm)
- > Suitable for MODU³
- > No LED points visible
- > Can be flexibly adapted (> 30 mm radius)

- > Dimmable: Yes
- > Material: Silicone sleeve
- > Width: 6.5 mm
- > Finish: Matt
- > Height: 6 mm
- > Degree of protection: IP44 (if cut, strip light needs to be sealed)
- > Mounting: For recess mounting, push fit into 6.5 x 6 mm groove
- > Section length: 50 mm
- > Max. bend radius: 30 mm
- > Supplied with: 1 roll
With 2.0 m lead with Loox5 24V connector

Illuminance in lx in relation to 1 m strip length:

3000 K		4000 K		120°	
950 lx	1020 lx	☀️		250 mm	
380 lx	410 lx			500 mm	
240 lx	255 lx			750 mm	
135 lx	150 lx			1000 mm	

! Order reference: Please order lead, driver and switch separately

➔ For use with Häfele MODU³ modular shelf storage frame sets 793.27.401 and 793.27.402
Installation tools are available to order separately: Ø 6.5 mm router 002.15.768 and soft seam roller 000.57.060

⚡ **5 24V** Loox5 24 V driver see page ▶ 1.121

LIGHTING & ELECTRICAL 2024, © Häfele U.K. Ltd 2024. Dimensional data not binding. We reserve the right to alter specifications without notice.

PAGE AMENDED
20.05.25/2



Häfele Loox5 LED 3084 Flex strip light

Voltage V	Number of LEDs LEDs/m	Colour temperature K	Wattage W/m	Luminous flux lm/m	Luminous efficacy lm/W	Colour rendering index CRI		Energy efficiency class	Section length C mm	Max. strip length (visual) m	Available length			
						R _a	R _g				0.55 m	0.85 m	3.0 m	5.0 m
5 ²⁴ V	Häfele Loox5 LED 3084													
	144	3000	9.6	680	71	>90	>50	A ⁺ G	50	5	833.75.346	833.75.356	833.75.366	833.75.376
		4000	9.6	730	76	>90	>50	A ⁺ G	50	5	833.75.347	833.75.357	833.75.367	833.75.377

! Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%. Please note: A strip section with a new power supply that follows immediately is noticeably brighter. Max. wattage-dependent strip length on the driver, see technical data for LED strip lights

→ Packed sets, Häfele Loox5 LED 3084 Flex strip light



Loox5 LED 3084 Flex strip light

Loox5 Eco driver, 40 W

Loox5 Eco driver, 90 W

Loox mains lead

Voltage V	Supplied with	Colour temperature K	Energy efficiency class	Section length C mm	Max. strip length (visual) m	Available length	Cat. No.
5 ²⁴ V	Loox5 compatible LED 3084 Flex strip light packed sets						
	1 roll LED 3084 Flex strip light 3.0 m length 1 Loox5 Eco driver 24 V, output power 40 W, 190 x 60 x 16 mm 1 Loox mains lead, UK moulded plug, 2000 mm length	3000	A ⁺ G	50	5	3000 mm	833.87.636
	1 roll LED 3084 Flex strip light 5.0 m length 1 Loox5 Eco driver 24 V, output power 90 W, 292 x 70 x 16 mm 1 Loox mains lead, UK moulded plug, 2000 mm length	3000	A ⁺ G	50	5	5000 mm	833.87.637
	1 roll LED 3084 Flex strip light 3.0 m length 1 roll LED 3084 Flex strip light 5.0 m length 1 Loox5 Eco driver 24 V, output power 90 W, 292 x 70 x 16 mm 1 Loox mains lead, UK moulded plug, 2000 mm length	3000	A ⁺ G	50	5	8000 mm	833.87.638

LIGHTING & ELECTRICAL 2024, © Häfele U.K. Ltd 2024. Dimensional data not binding. We reserve the right to alter specifications without notice.

Furniture Lighting: LED Lighting & Accessories