



### AFDMR11

9W Mini LED Fire Rated IP65 Baffled Downlight



#### PRODUCT FEATURES

- Black and White Baffle Included
- Magnetic Bezel
- Insulation Coverable
- 30, 60, 90 Minutes Fire Rated (Timber Joists)
- Tested to meet Part C (Moisture) and Part E (Acoustic)
- High Colour Rendering Index CRI 90+
- 5 Year Guarantee

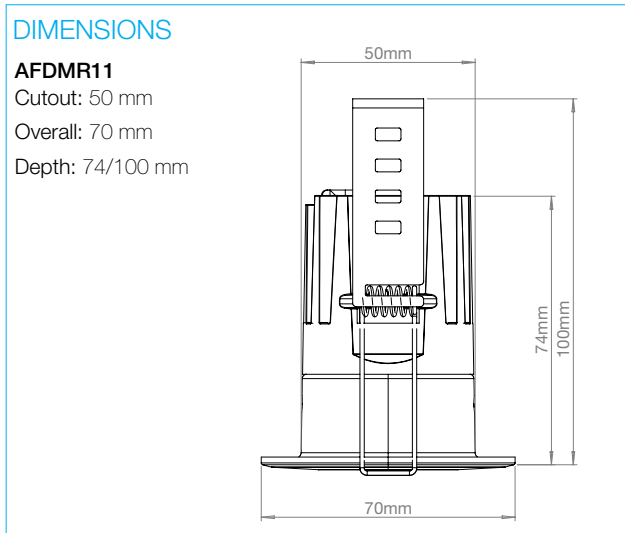

Product Code	AFDMR11/30	AFDMR11/40
Useful Luminous Flux (LM)	580lm	620lm
CCT (Kelvin)	3000K	4000K
Beam Angle (°)	35°	35°
SDCM	≤4	≤4
CRI	90	90
Peak Intensity (cd)	1470	1750
Operating Voltage (VAC)	220-240 VAC	220-240 VAC
Max Output Power (W)	9W	9W
Operating Current (A max)	260mA	260mA
Class	II	II
Body Material	Cast Aluminum	Cast Aluminum
Cut out	50mm	50mm
Frame Colour	White + Black	White + Black
Switching Cycles	≤100,000	≤100,000
Ingress Protection	IP65	IP65
Ambient Operating Temperature (°)	-20~+45°C	-20~+45°C
Input Frequency (Hz)	50/60Hz	50/60Hz
Guarantee	5 years	5 years
Dimmable	Yes	Yes
Cable Length	300mm	300mm
Life Time (L70 B50)	> 50,000hrs	> 50,000hrs
R9 Colour Rendering Index Value	66	66
Lumen Maintenance Factor	96%	96%